

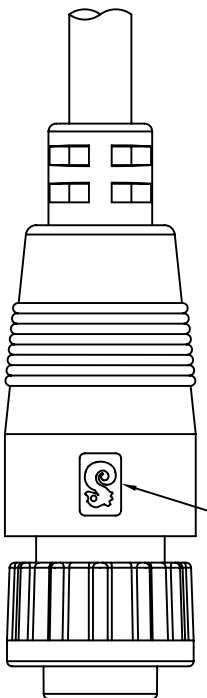


REV.	E/CN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S091222-3A	LILY	2010.01.21

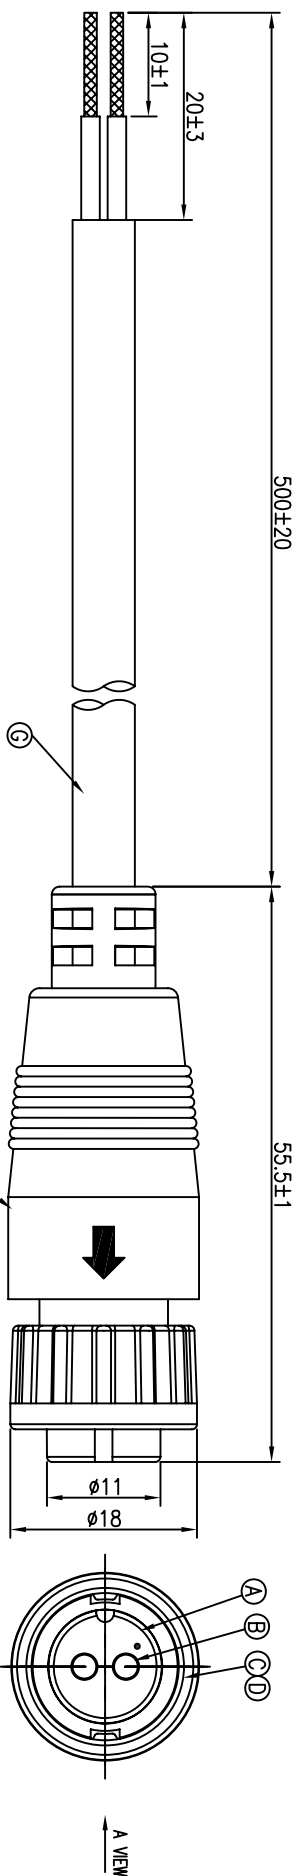

BLACK	2
RED	1
WIRE COLOR	CONN.
PIN OUT	



- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 10A
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

H	CABLE GLAND	1	NYLON UL94V-2	BLACK
G	CABLE	1	UL2464 18AWG*2C (UV RESISTANT) OD=φ5.2	BLACK (PVC JACKET)
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+33%GF	BLACK
B	FEMALE PIN	2	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
XX :±0.3	XX :±1°
XXX :±0.2	

Singatron Enterprise Co., Ltd.
 信亨企業股份有限公司
 CIRCULAR STANDARD SIZE (IP67)
 FEMALE CONN. FEMALE 2PIN(10A) LOCK TYPE
PART NO.2CT3004-W02416
 DWG LILY SCALE 2:1 UNIT: mm
 CHKD Steve SIZE: A3 SHEET:1 OF 1 REV: A
 APVD Max
CUSTOMER COPY