




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T100609-3B	LILY	2010.08.06
B	ECN NO.:S100908	LILY	2010.09.21

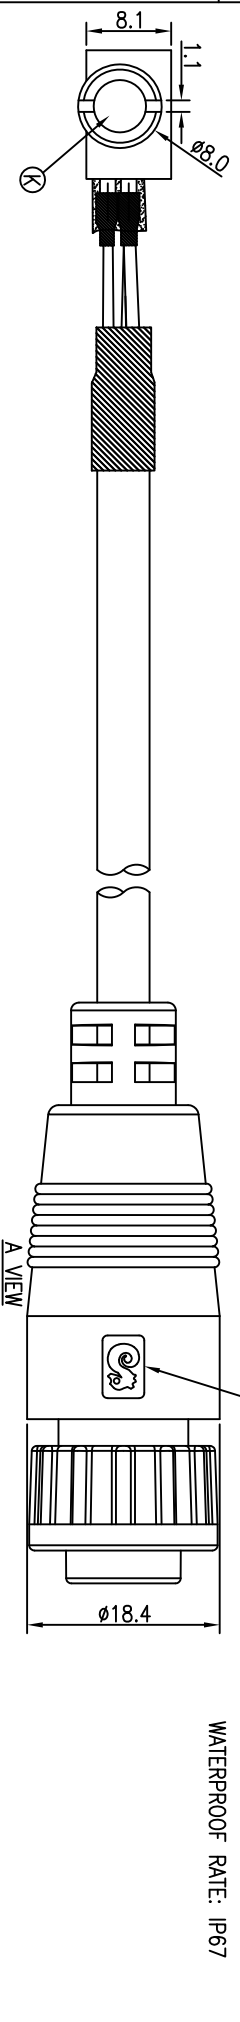

CONN.2	WIRE COLOR	CONN.1
R	BLUE	3
L	BROWN	2
G	BLACK	1

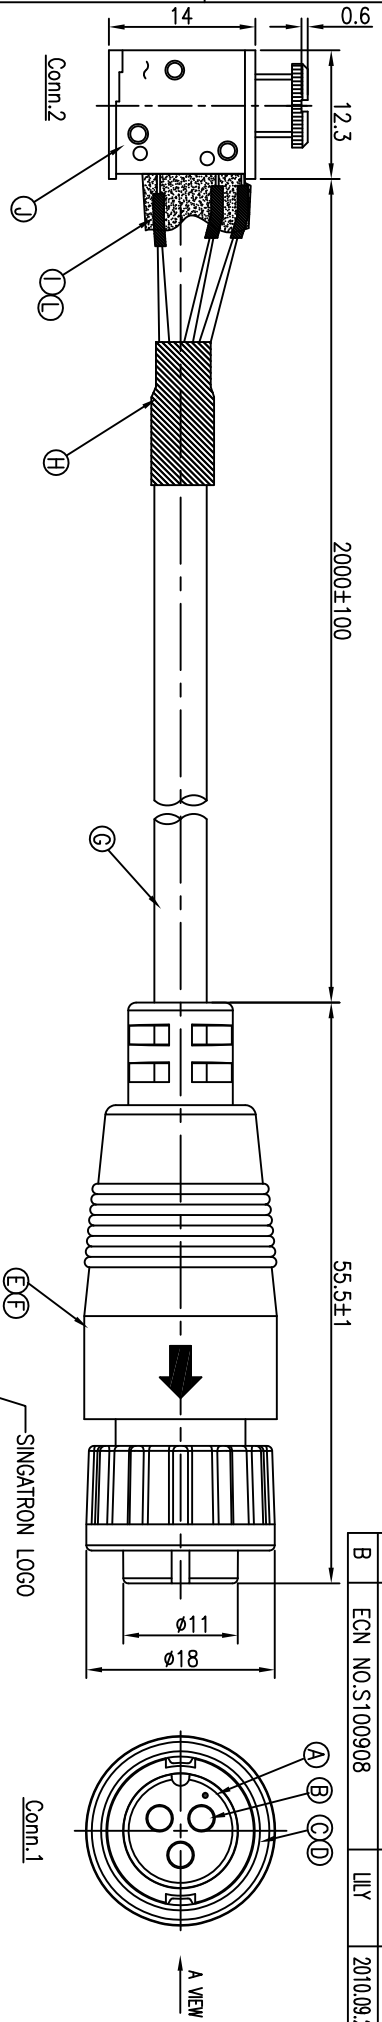

SCHEMATIC	
○ #G	○ #L
□	□

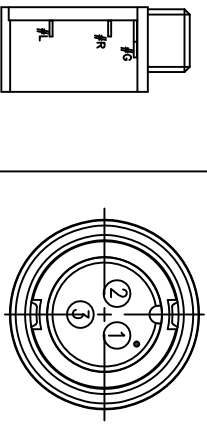

Pin Assignments  
Front View

NOTES:

1. WATERPROOF RATE: IP67
2. CURRENT RATING: 5A
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	BODY	1	NYLON+33%GF	BLACK
B	FEMALE PIN	3	Phosphor Bronze C5441	6u" GOLD PLATING OVER NICKEL PLATING
C	LOCK NUT	1	NYLON+33%GF	BLACK
D	O-RING	1	EPDM	BLACK
E	OVER MOLD	1	PVC	BLACK
F	INNER MOLD	1	TPU	NATURAL
G	CABLE	1	UL2464 22AWG*3C+ Al/MY(UV RESISTANT) OD=φ5.0	BLACK(PVC JACKET)
H	SHRINK TUBE	1	φ6*15	BLACK
I	SHRINK TUBE	3	φ2.0*10	BLACK
J	AUDIO JACK	1	P/N:2SJ-03733T13	BLACK
K	NUT	1	φ7MM 螺絲帽	N/A
L	THERMAL GLUE	1	BRASS	NICKEL PLATING

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X.XX ±:0.2 X.X ±:0.3 X.X ±:1° X.XX ±:0.2

Singatron Enterprise Co., Ltd.  
信音企業股份有限公司

CIRCULAR STANDARD SIZE (IP67)  
FEMALE CONN. FEMALE SHRN(SA) LOCK TYPE

PART NO.2CT3004-W03302  
SCALE 2:1 UNIT: mm  
SIZE: A3 SHEET:1 OF 1 REV: B  
CUSTOMER COPY