

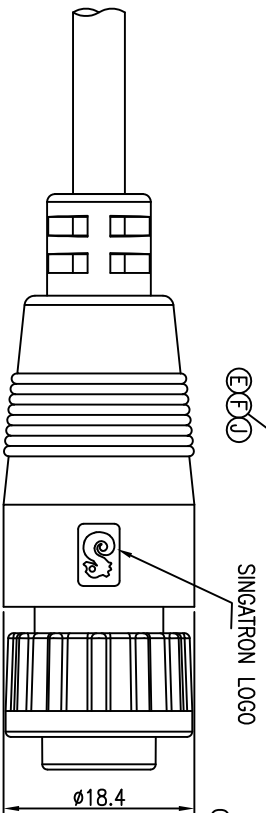


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO: T100802-5A		Harlen	2010.08.03
B	ECN NO: S101109		Harlen	2010.11.08
C	ECN NO: S110129		Harlen	2011.01.24

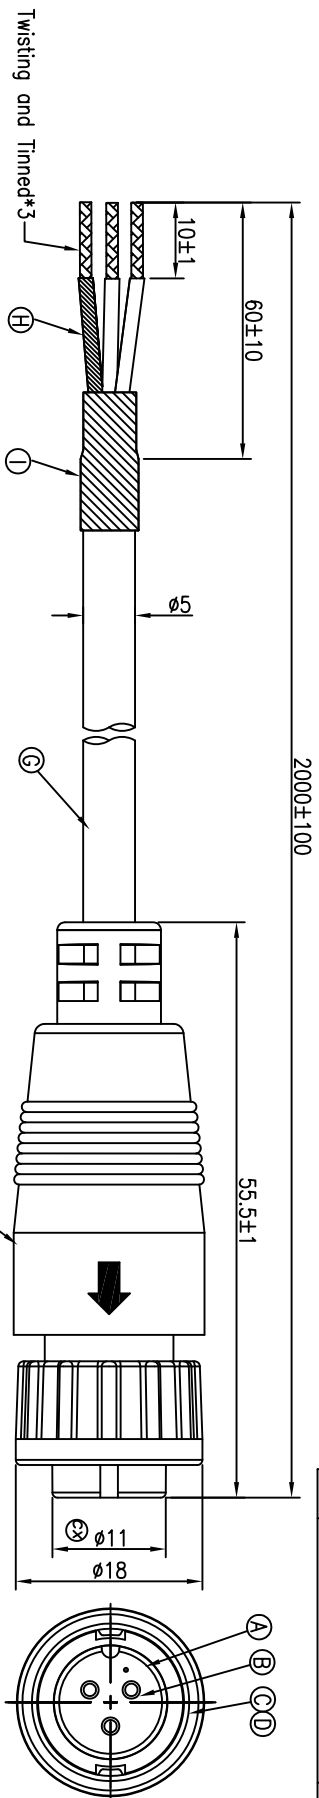

CONN. WATERPROOF RATE: IP67

Drain	3
BLACK	2
RED	1
WIRE COLOR	CONN.
PIN OUT	



Pin Assignments  
Front View

NOTES:

1. WATERPROOF RATE: IP67  
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
2. CURRENT RATING: 5A
3. SPECIFICATIONS: SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

K	LABEL	1	2" * 1.43" LABEL	WHITE
J	HEAT SHRINK TUBE	1	POLYOLIFEN Ø1.0 * 1.10	BLACK
I	HEAT SHRINK TUBE	1	POLYOLIFEN Ø5.0 * 1.20	BLACK
H	HEAT SHRINK TUBE	1	POLYOLIFEN Ø1.0 L:50	WHITE
G	CABLE	1	UL2464 22AWG*2C+AL D+B(UV)	BLACK(PVC JACKET)
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+GF	BLACK
B	FEMALE PIN	3	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

Singatron Enterprise Co., Ltd.  
 信登企業股份有限公司

TITLE	CIRCULAR STANDARD SIZE (IP67) LOCK TYPE
DWN	Harder 2011.01.27
CHKD	Steng 2011.01.27
APVD	Meng 2011.01.27
SCALE	2:1
UNIT:	mm
SIZE:	A3
SHEET:	1 OF 1
REV:	C

CUSTOMER COPY