




REV	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.: S130103-5A		JF	2013.03.05
B	ECN NO.: S130349		JF	2013.03.21
C	ECN NO.: S130423		JF	2013.04.07

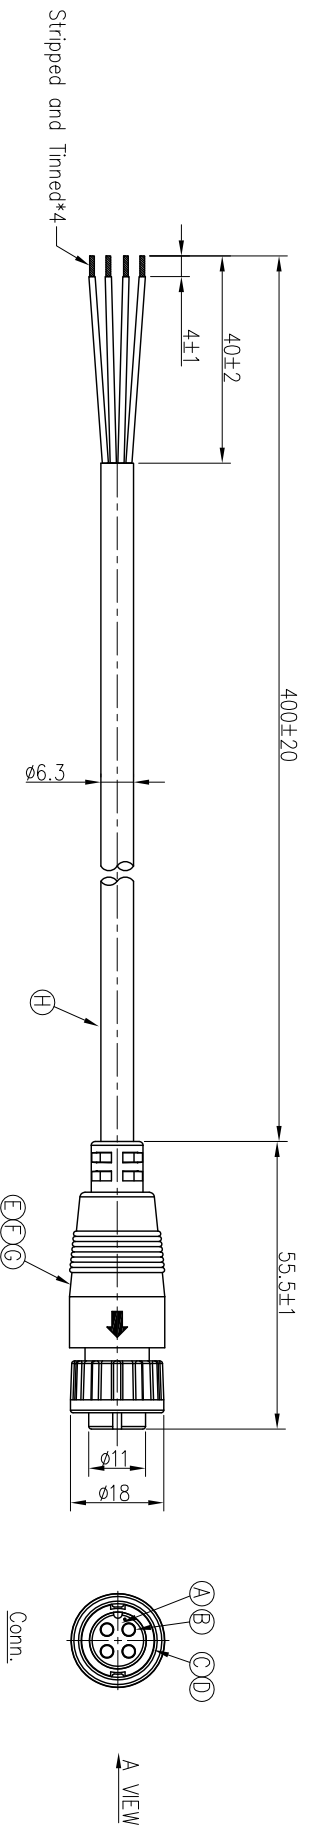

WATERPROOF RATE: IP67

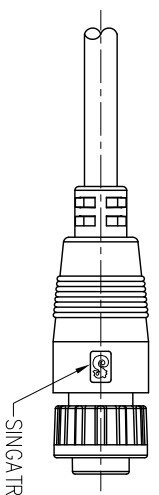


A VIEW



A VIEW

YELLOW	4
GREEN	3
BLUE	2
RED	1
WIRE COLOR	CONN.
PIN OUT	
CONN.	

Short



Pin Assignments
Front View

- NOTES:
1. WATERPROOF RATE: IP67
 2. IP67: IMMersed IN 1M WATER FOR 30 MINUTES
 3. CURRENT RATING: 10A
 4. SPECIFICATIONS: SEE "CIRCULAR SERIES SPECIFICATIONS".
 5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	BODY	1	PA66+30%GF	BLACK
B	FEMALE PIN	4	Phosphor Bronze	(1~3)u" GOLD PLATING OVER NICKEL PLATING
C	LOCK NUT	1	PA66+30%GF	BLACK
D	O-RING	1	EPDM	BLACK
E	OVER MOLD	1	PVC	NATURAL
F	INNER MOLD	1	TPU	BLACK
G	HEAR SHRINK TUBE	2	Ø3.0 300V 125°	BLACK
H	CABLE (客#)	1	4*0.5mm ² OD=6.3mm (-40°C~105°C)	BLACK(PVC JACKET)

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X : ±0.5 X : ±2°

X.X : ±0.3 X.X : ±1'

X.XX : ±0.2 X.XX : ±1'

Singatron Enterprise Co., Ltd 信營企業股份有限公司	
TITLE	CIRCULAR STANDARD SIZE (IP67) FEMALE CONN. FEMALE 4 PIN LOCK TYPE
DWN	JF PART NO.: 2CT3004-W04438H
CHKD	Harlen SCALE 1:1 UNIT: mm
APVD	Steve SIZE: A3 SHEET: 1 OF 1 REV: C

CUSTOMER COPY