




REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	S160520-14A	Vicky	2016.05.20

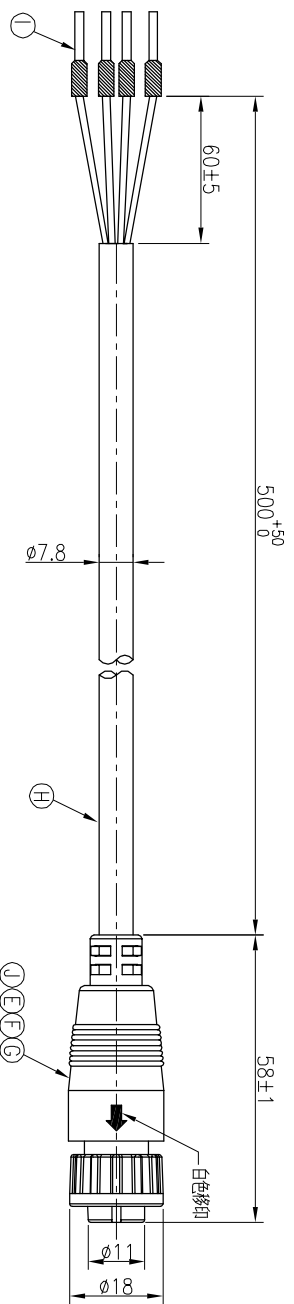

Conn.

WATERPROOF RATE: IP67




A VIEW

YELLOW	4
BLUE	3
BLACK	2
RED	1
WIRE COLOR	CONN.
PIN OUT	
CONN.	

Short

CUSTOMER P/N	SINGATRON P/N
K310471841893	2CT3004-W044D3H



Pin Assignments
Front View

- NOTES:
1. WATERPROOF RATE: IP67
 2. CURRENT RATING: 10A
 3. SPECIFICATIONS: SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**

J	WIRE	1	UL1007 24AWG L=30	BLACK
I	TERMINAL (套#)	4	BRASS 1mm ²	N/A
H	CABLE (套#)	1	H05RR-F 4*0.75mm ²	BLACK
G	HEAR SHRINK TUBE	4	Ø3.0 300V 125°	BLACK
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PA66+GF	BLACK
B	FEMALE PIN	4	Phosphor Bronze	(1~3)µ" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X : ±0.5 X : ±2°
X.X : ±0.3 X.X : ±1°
X.XX : ±0.2

Singatron Enterprise Co., Ltd.
信登企業股份有限公司

CIRCULAR STANDARD SIZE (IP67)
FEMALE CONN. FEMALE 4 PIN LOCK TYPE

PART NO. 2CT3004-W044D3H

SCALE 1:1 UNIT: mm

SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY