




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T09012012A	Steve	2009.04.28

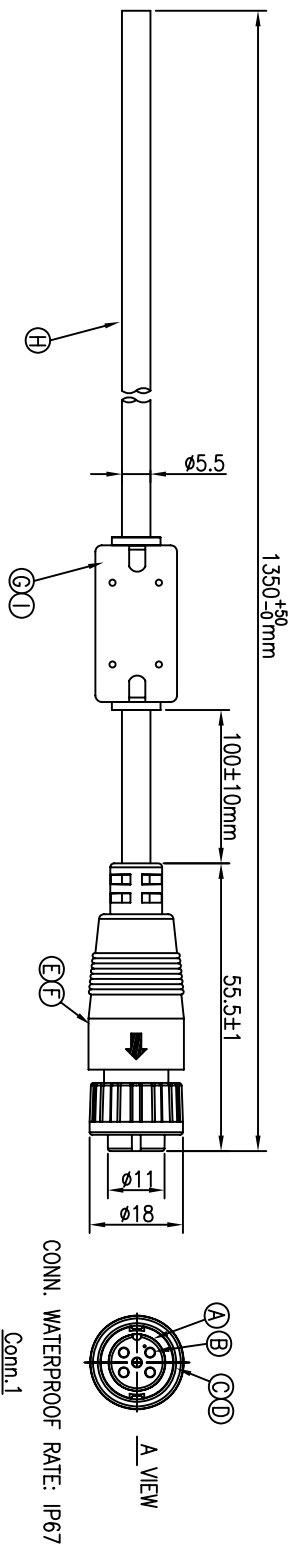

CONN. WATERPROOF RATE: IP67
Conn.1

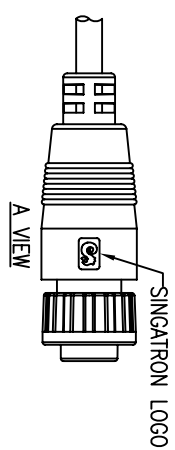

DRAIN	5
YELLOW	4
RED	3
BLUE	2
BLACK	1
WIRE COLOR	CONN.
PIN OUT	



Pin Assignments
Front View

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 5A
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS

I	OVER MOLD	1	PVC		BLACK
H	CABLE	1	UL2464 20AWG*4C+ D+AL,PVC JACKET		BLACK
G	CORE	1	Ø14.2*Ø6.35*28.5		BLACK
F	INNER MOLD	1	TPU		NATURAL
E	OVER MOLD	1	PVC		BLACK
D	O-RING	1	EPDM		BLACK
C	LOCK NUT	1	NYLON+GF		BLACK
B	FEMALE PIN	5	Phosphor Bronze Alloy	6u" GOLD PLATED OVER NICKEL PLATING	
A	BODY	1	NYLON+GF		BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR	

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信亨企業股份有限公司

DECIMALS:	ANGLES:	TITLE	CIRCULAR STANDARD SIZE (IP67)	FEMALE CONN. FEMALE 5 PIN(S)	LOCK TYPE
X :±0.5	X :±2°	DMN	Steve	PART NO.2CT3004-W05303	
XX :±0.3	XX :±1°	CHKD	Quan	SCALE 1:1 UNIT: mm	
XXX :±0.2		APVD	Mox	SIZE: A3 SHEET:1 OF 1 REV: A	

CUSTOMER COPY