

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T141128-2A Vicky	2014.11.28	

2015/04/16

8:54:05

CONN. WATERPROOF RATE: IP67


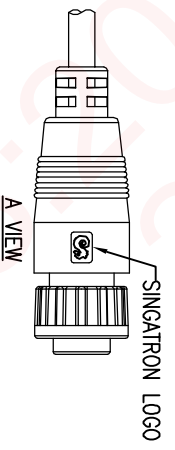
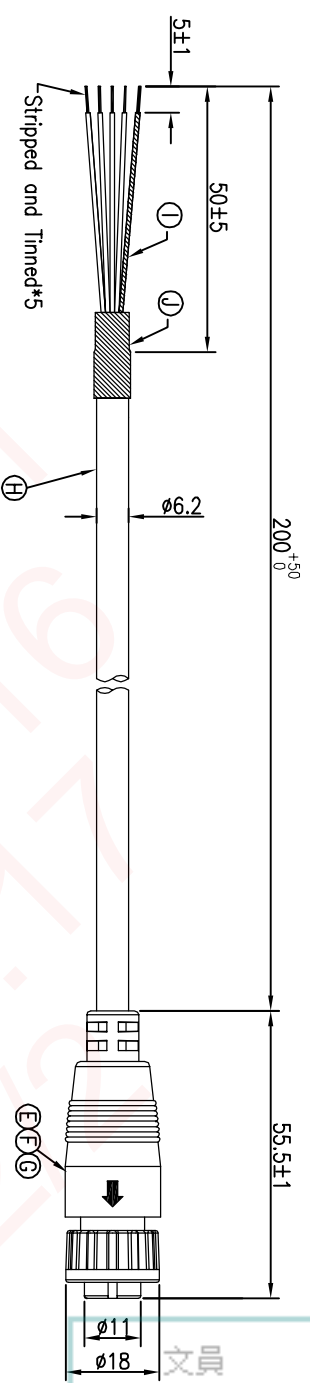
Conn.1

文鼎


CCC(SZ)

CCC(SZ)

A VIEW






DRAIN	5
ORANGE	4
RED	3
BROWN	2
BLACK	1
WIRE COLOR	CONN.
PIN OUT	



Pin Assignments
Front View

NOTES:

1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
2. CURRENT RATING: 5A
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: 

J	HEAR SHRINK TUBE	1	Ø7.0 L=20 300V 125°	BLACK
I	HEAR SHRINK TUBE	1	Ø1.0 L=50 300V 125°	BLACK
H	CABLE	1	UL2517 20AWG*4C+ D+AL(UV) OD6.2	BLACK(PVC JACKET)
G	HEAR SHRINK TUBE	1	Ø1.0 L=10 300V 125°	BLACK
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+GF	BLACK
B	FEMALE PIN	5	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
 Singatron Enterprise Co., Ltd. 信登企業股份有限公司				
TITLE: CIRCULAR STANDARD SIZE (IP67) FEMALE CONN. FEMALE 5 PIN(SA) LOCK TYPE				
DWN	Vicky	PART NO.	2CT19004-W05928H	
CHKD	Harden	SCALE	1:1	UNIT: mm
APVD	Steve	SIZE: A3	SHEET: 1 OF 1	REV: A
CUSTOMER COPY				