

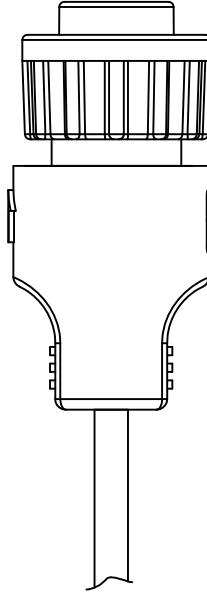


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T110113-5A	LILY	2011.08.04
B	ECN NO.:S111217	LILY	2011.12.13

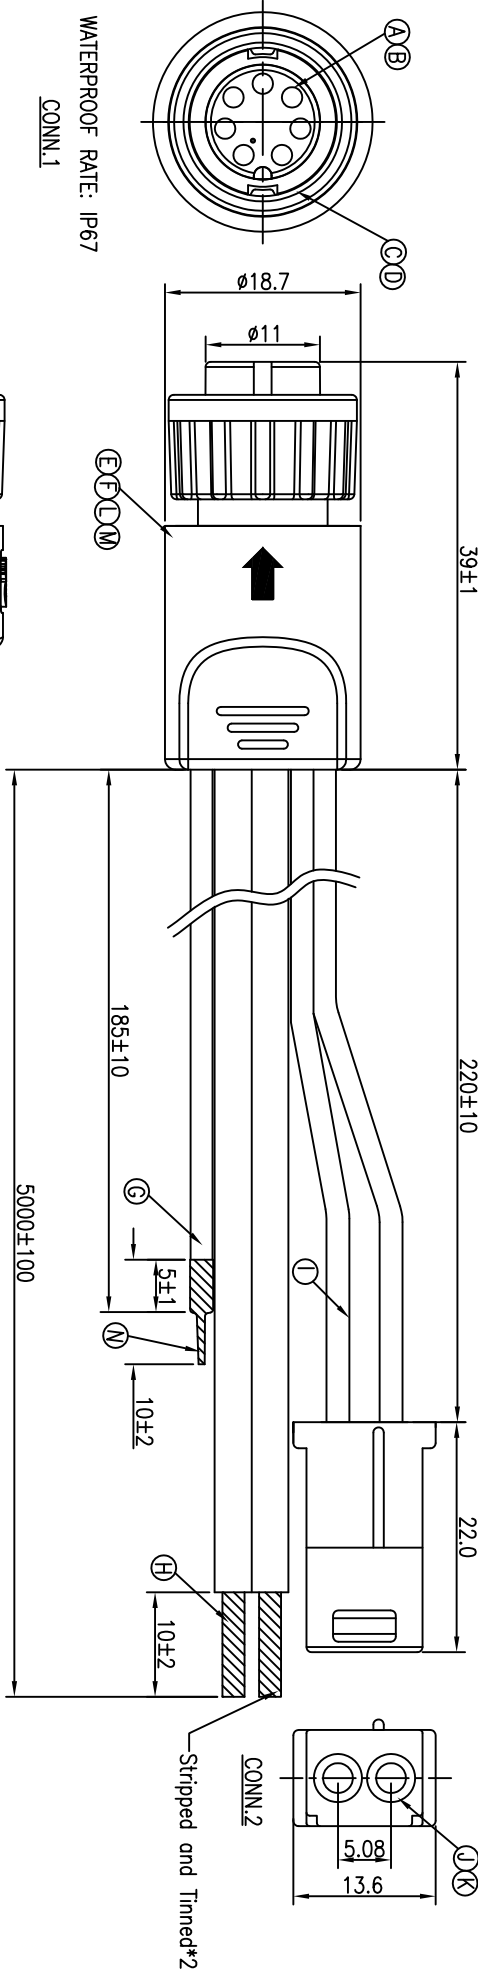

CONN.1	WIRE COLOR	CONN.2	PIN OUT
7	BLACK (14AWG)		
6	GRAY/BLACK (18AWG)	2	
5	GRAY (18AWG)		
4	ORANGE (18AWG)	1	
3	ORANGE (18AWG)		
2	RED (14AWG)		
1			

- NOTES:
1. WATERPROOF RATE: IP67  
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
  2. CURRENT RATING: 5A
  3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
  4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

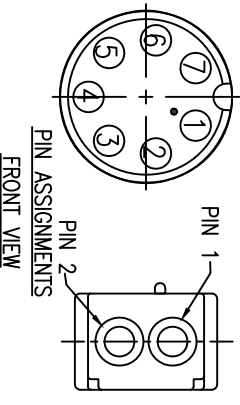

CONN.1	WIRE COLOR	CONN.2	PIN OUT
7	BLACK (14AWG)		
6	GRAY/BLACK (18AWG)	2	
5	GRAY (18AWG)		
4	ORANGE (18AWG)	1	
3	ORANGE (18AWG)		
2	RED (14AWG)		
1			

COMGROUP AUSTRALIA PTY LTD  
PART NO.6102 310 05601

N	SHRINK TUBE	1	Ø3.0 125°C 300V	BLACK
M	WIRE	1	UL1007 18AWG	RED
L	WIRE	1	UL1007 18AWG	BLACK
K	TERMINAL	2	PHOSPHOR BRONZE	TIN-PLATING
J	HOUSING	1	NYLON 66 UL94V-2	WHITE
I	CABLE FIG8	1	FB 18AWG*2C	GRAY&GRAY/BLACK
H	CABLE FIG8	1	FB 14AWG*2C	BLACK&RED
G	WIRE	1	UL1007 18AWG	ORANGE
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	LOCK NUT	1	NYLON+33%GF	BLACK
C	O-RING	1	EPDM	BLACK
B	FEMALE PIN	7	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

TITLE: SDM600 LT LEAD

Singatron Enterprise Co., Ltd.  
信管企業股份有限公司

CHKD	SCALE	2:1	UNIT	mm	REV	B
APVD	Tony	SIZE: A3	SHEET: 1 OF 1			

CUSTOMER COPY