




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:C100428-2A	Shawn	2010.04.29

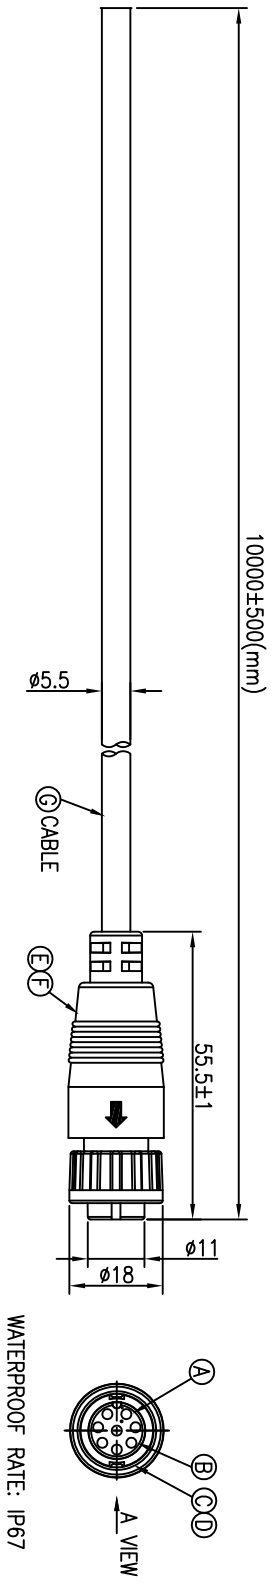

WHITE/BROWN	8
BROWN	7
WHITE/GREEN	6
GREEN	5
WHITE/BLUE	4
BLUE	3
WHITE/ORANGE	2
ORANGE	1
WIRE COLOR	CONN.
PIN OUT	



Pin Assignments  
Front View

- NOTES:
1. WATERPROOF RATE: IP67
  2. CURRENT RATING: 5A
  3. SPECIFICATIONS: SEE "CIRCULAR SERIES SPECIFICATIONS".
  4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS

G	CABLE	1	AMP CAT.5e UTP 24AWG*4P, OD=5.5	GRAY(PVC JACKET)
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+33%GF	BLACK
B	FEMALE PIN	8	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.  
信登企业股份有限公司

DECIMALS:	ANGLES:	TITLE
X : ±0.5	X : ±2°	CIRCULAR STANDARD SIZE (180° IP67) FEMALE CONN. FEMALE 8 PIN/LOCK TYPE
X.X : ±0.3	X.X : ±1°	DWN Shawn PART NO. 2CT3004-W08310
X.XX : ±0.2		CHKD Steve SCALE 2:1 UNIT: mm
		APVD Max SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY