




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.: C100719-1B	Shawn	2010.08.06

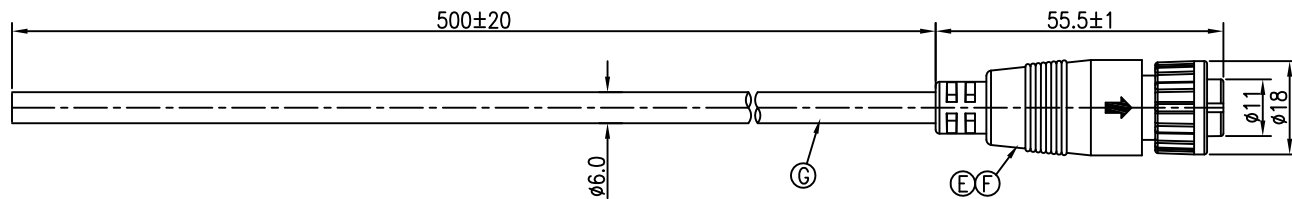


WATERPROOF RATE: IP67

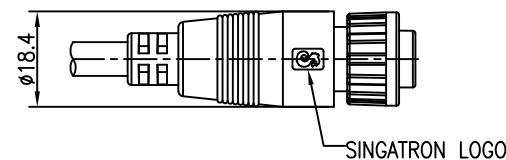

A VIEW

8	WHITE/BROWN
7	BROWN
6	WHITE/GREEN
5	GREEN
4	WHITE/BLUE
3	BLUE
2	WHITE/ORANGE
1	ORANGE
CONN.	WIRE COLOR

PIN OUT



Pin Assignments

Front View

NOTES:

1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
2. CURRENT RATING: 5A
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**

G	CABLE	1	UL CAT.5e FTP 24AWG*4P, OD=Ø6.0	BLACK(PVC JACKET)
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+GF	BLACK
B	FEMALE PIN	8	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

TITLE	CIRCULAR STANDARD SIZE (180° IP67) FEMALE CONN. FEMALE 8 PIN/LOCK TYPE		
DWN	Shawn	PART NO.2CT3004-W08319	
CHKD	Steve	SCALE 2:1	UNIT: mm
APVD	Quan	SIZE: A3	SHEET:1 OF 1 REV: A

CUSTOMER COPY