REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDRNO:T091107-2A	HARLEN	2009.12.31
B	ECN NO:S110707	HARLEN	2011.8.2

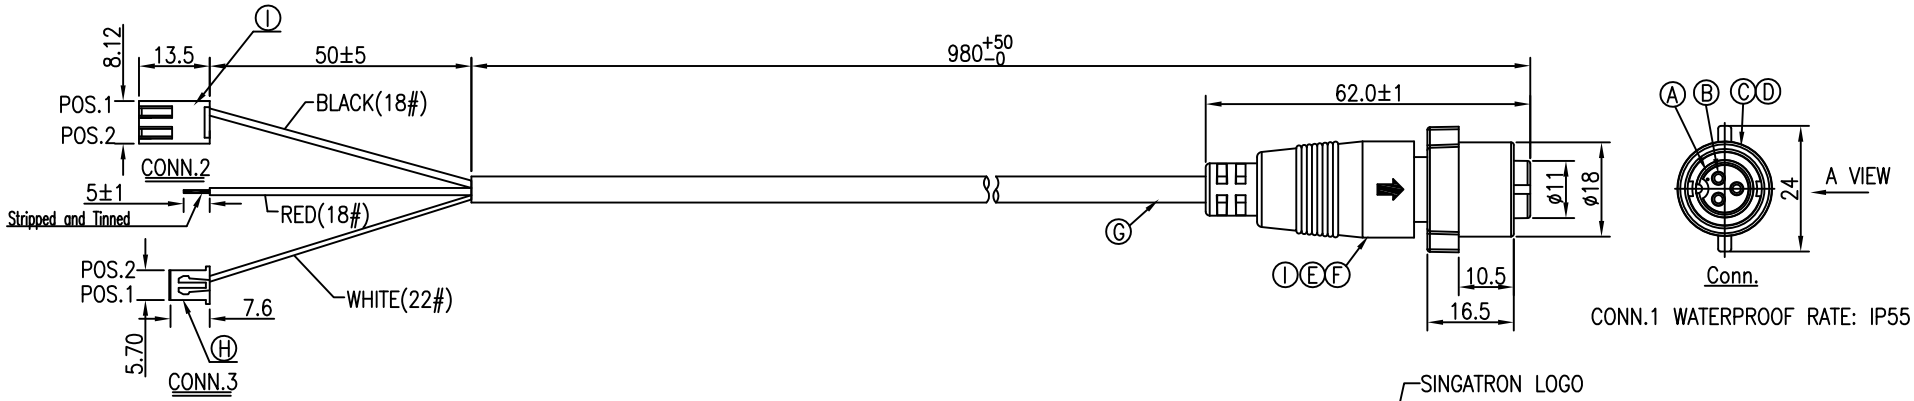

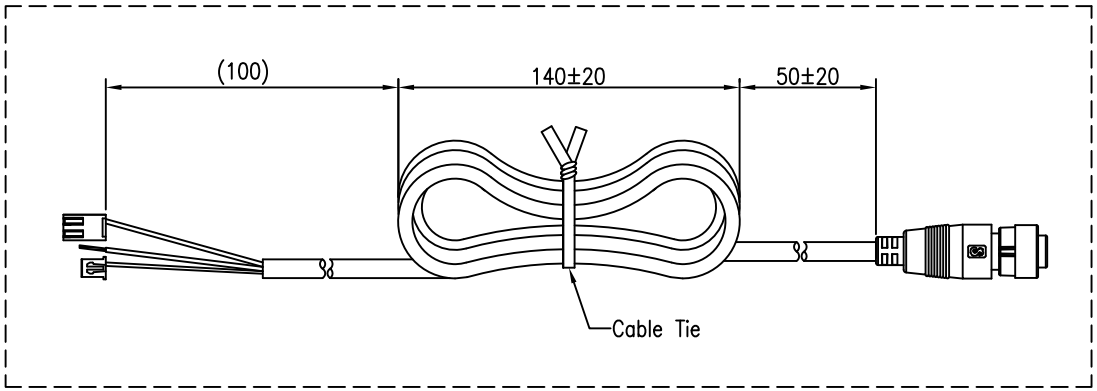

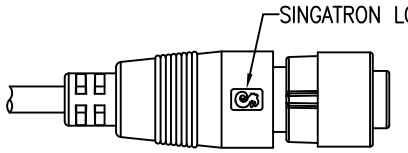

I	CONNECTOR	1	BRASS	TINNED
		1	NYLON 66 UL 94V-0	WHITE
H	CONNECTOR	1	PHOSPHOR BRONZE	TINNED
		1	NYLON 66 UL 94V-0	WHITE
G	CABLE	1	UL2464 18AWG*2C+ 22AWG*1C +Al/My (UV RESISTANT) OD6.0	BLACK (PVC JACKET)
F	INNER MOLD	1	PVC	BLACK
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PA66+30%GF	BLACK
B	MALE PIN	3	HBi59-1.5B	1u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+30%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

2	N/A	WHITE	3
N/A	1	BLACK	2
N/A	N/A	RED	1
CONN.3	CONN.2	WIRE COLOR	CONN.1

PIN OUT



Pin Assignments
Front View

NOTES:

1. WATERPROOF RATE: IP55
2. ELECTRICAL CHARACTERISTICS
   CURRENT RATING: 10A
3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS

UNLESS OTHERWISE SPECIFED TOLERANCES

DECIMALS: X :±0.5, X.X :±0.3, X.XX :±0.2
ANGLES: X :±2°, X.X :±1°

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

TITLE	CIRCULAR STANDARD SIZE (LOCK TYPE) FEMALE CONN. FEMALE 3 PIN(10A)			
DWN	Harlen 2011.8.15	PART NO.2CT3016-W03403		
CHKD	Steve 2011.8.15	SCALE 1:1	UNIT: mm	
APVD	Tony 2011.8.15	SIZE: A3	SHEET:1 OF 1	REV:B

CUSTOMER COPY

文件編號 RD-06-043-A