



REV.	ECN NO.	OR.	DESCRIPTION	REVISED	DATE
A	PDR NO:1170406-3A		Yong	2018.01.08	
B	ECN NO.:S202005-C11		RZ	2020.07.06	
C	ECN NO.:S202104-C05		Jun	2021.04.14	

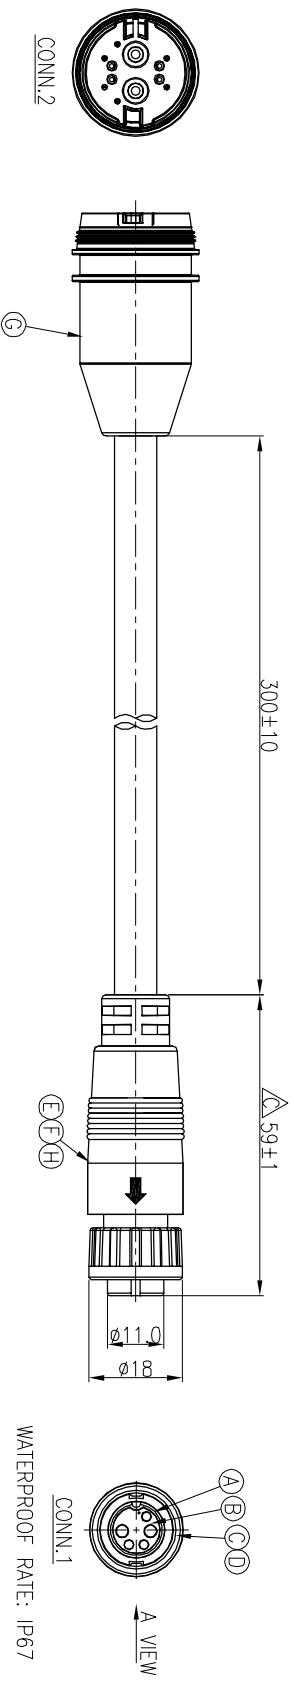


2	BLUE(0.35mm ²)	5
1	GREEN(0.35mm ²)	2
6	BLACK(1.0mm ²)	1
CONN.2 WIRE COLOR		CONN.1
PIN OUT		

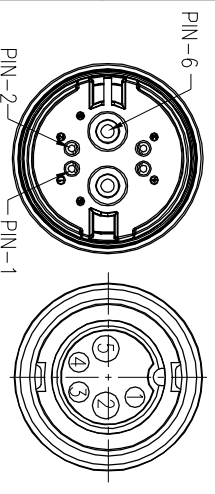

Pin Assignments
Front View

Pin Assignments
Front View

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 5+10A
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

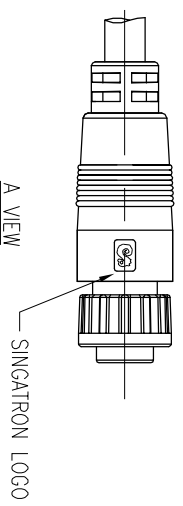

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	BODY	1	NYLON+GF	BLACK
B	MALE PIN	5	BRASS	GOLD PLATING OVER NICKEL PLATING

G	CONNECTOR (客#)	1	(物料规格) PAN3001-04-600-C	BLACK
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+GF	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.5 X :±2°

X.X :±0.3 X.X :±1°

X.XX :±0.2

Singatron Enterprise Co., Ltd.
信安企业股份有限公司

TITLE: CIRCULAR STANDARD SIZE (LOCK TYPE)
FEMALE CONN. MALE (2+3) PIN(10+5)A

DWN Jun PART NO.2CT3016-W05824H

CHKD JF SCALE 1:1 UNIT: mm

APVD Steve SIZE: A3 SHEET:1 OF 1 REV: C

CUSTOMER COPY