

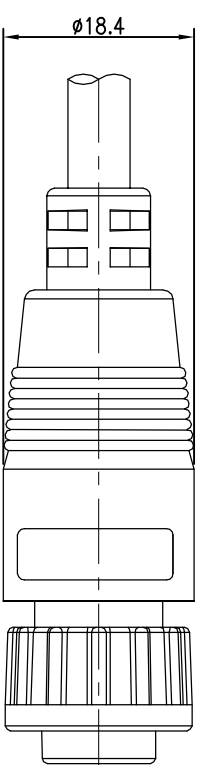


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	S170109-5A	Wcky	2017.01.09

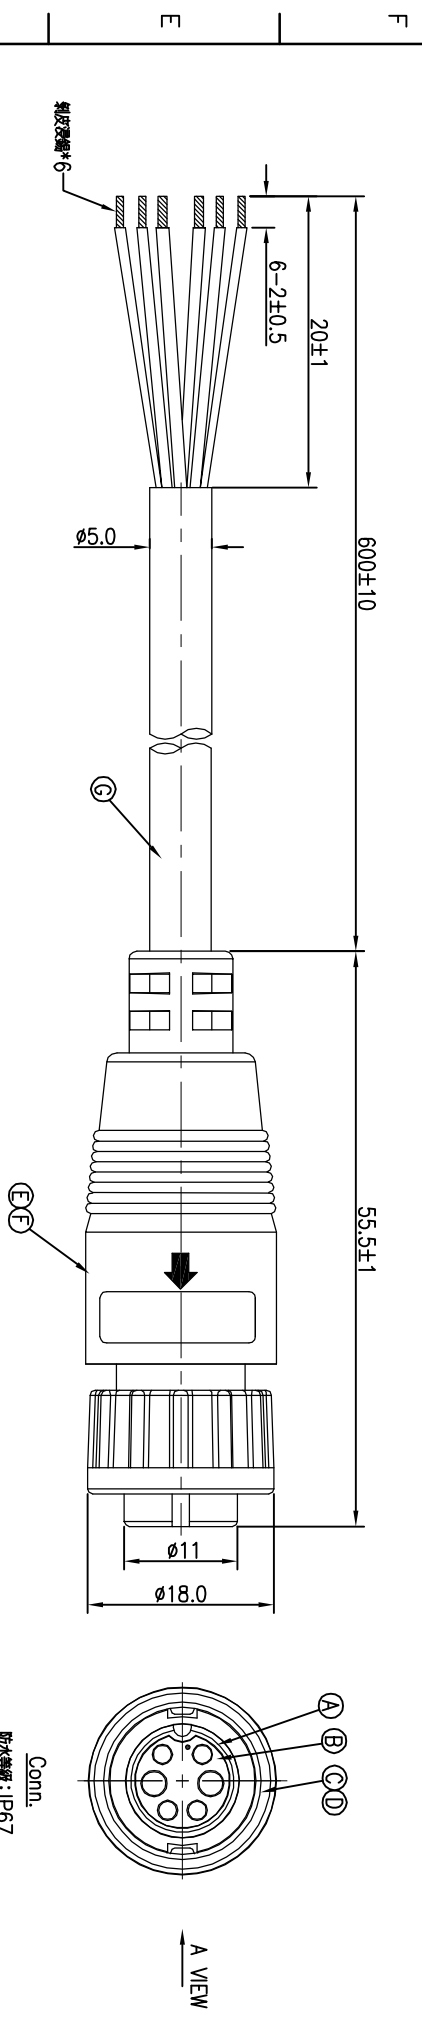

黑 (24AWG)	6
灰 (22AWG)	5
藍 (24AWG)	4
綠 (24AWG)	3
白 (22AWG)	2
紅 (24AWG)	1
芯線顏色	CONN.



Pin Assignments
Front View

- 註釋:
1. 防水等級: IP67
 2. IP67: 沉浸在1米深的水中30分鐘;
 3. 額定電流: 5A+10A(線纜接頭);
 4. 規格符合圖形連接器系列規格;
 5. 符合無害物質管理規格;
 6. 綠色產品包裝標識:

G	線材	1	24AWG*4C+22AWG*2C	BLACK NBR JACKET
F	內襯	1	TPU	NATURAL
E	外襯	1	PVC	BLACK
D	O型圈	1	EPDM	BLACK
C	卡合式螺母	1	PA66+30%GF	BLACK
B	端子	6	BRASS	1~3µ" GOLD PLATING OVER NICKEL PLATING
A	膠芯	1	PA66+30%GF	BLACK
NO	產品編號			

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.5 X :±2°

X.X :±0.3 X.X :±1'

X.XX :±0.2

Singatron Enterprise Co., Ltd.
信亨企業股份有限公司

TITLE: CIRCULAR STANDARD SIZE (IP67)
FEMALE CONN. MALE 2+4PIN(10A+5A) LOCK TYPE

DWN: Vicky PART NO. 2CT3016-W06830H

CHKD: Harlen SCALE 2:1 UNIT: mm

APVD: Steve SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY