

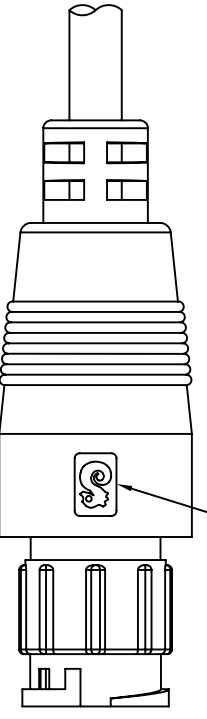


REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T100210-3A	LILY	2010.03.18

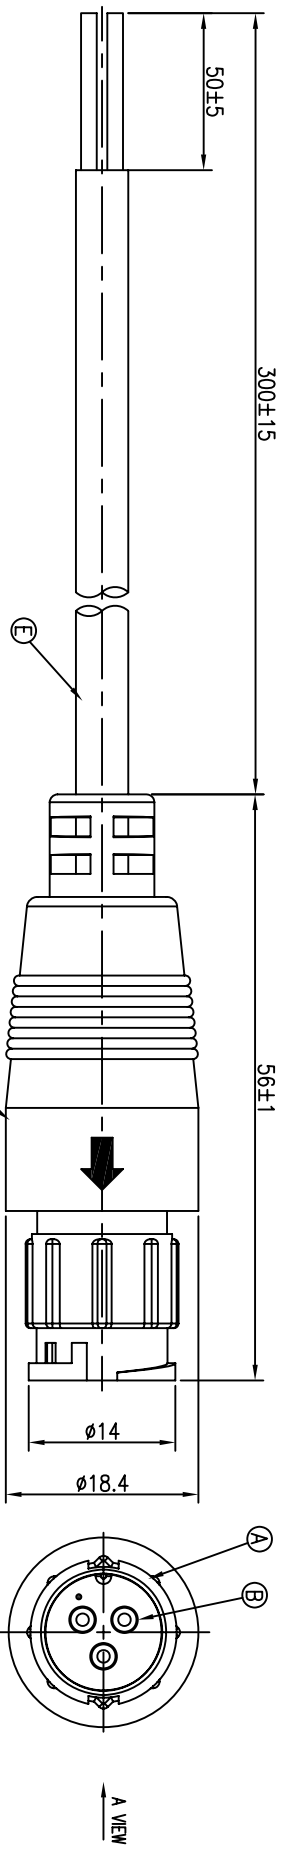

YELLOW	3
WHITE	2
BLACK	1
WIRE COLOR	CONN.
PIN OUT	



Pin Assignments
Front View

- NOTES:
1. WATERPROOF RATE: IP67(WHEN PROPERLY MATED)
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 10A
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

E	CABLE	1	UL2464 20AWG*3C+ AI/MY(UV RESISTANT) OD=φ5.0	BLACK(PVC JACKET)
D	INNER MOLD	1	TPU	NATURAL
C	OVER MOLD	1	PVC	BLACK
B	MALE PIN	3	BRASS	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司	
DECIMALS:	ANGLES:	CIRCULAR STANDARD SIZE (IP67)	
X : ±0.5	X : ±2°	MALE CONN. MALE 3PIN(10x) LOCK TYPE	
X.X : ±0.3	X.X : ±1'	PART NO. 2CT13024-P03401	
X.XX : ±0.2		SCALE 2:1 UNIT: mm	
		SIZE: A3 SHEET: 1 OF 1 REV: A	

CUSTOMER COPY