




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S101202-7A	Shown	2011.01.08
B	ECN NO.:S110206	Shown	2011.02.15

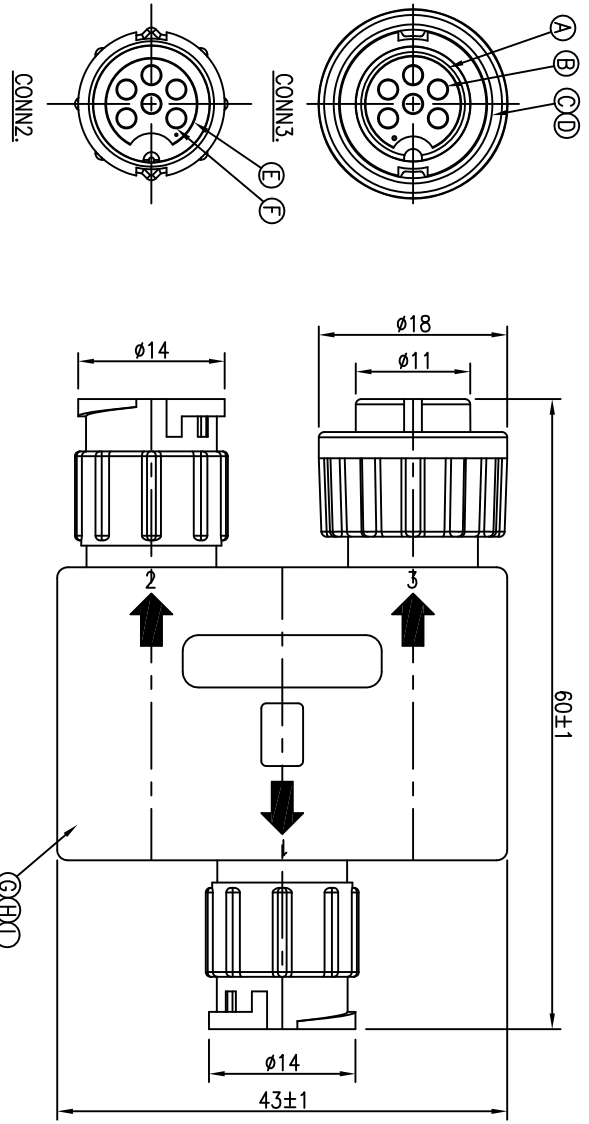


WATERPROOF RATE: IP67

GREEN	1	6	—
WHITE	2	5	—
GREEN	4	—	5
WHITE	3	—	6
BROWN	—	4	4
BLUE	—	3	3
BLACK	—	2	2
RED	—	1	1
WIRE COLOR	CONN1, CONN2, CONN3.		
	PIN OUT		
CONN1.		CONN2.	
CONN1.		CONN3.	

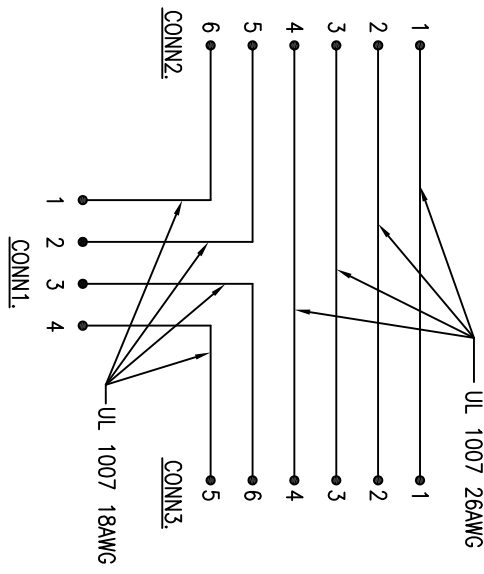

- NOTES:
1. WATERPROOF RATE: IP67
 2. CURRENT RATING: 5A
 3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

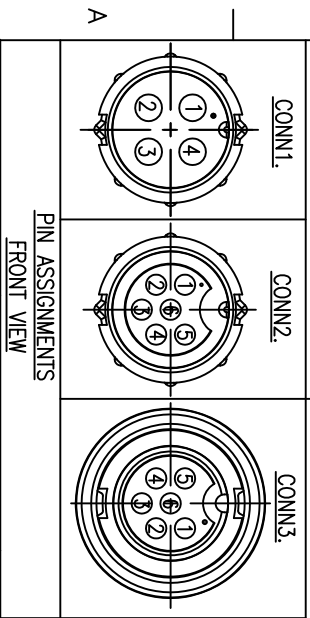

PIN ASSIGNMENTS
FRONT VIEW

K	MALE PIN	4	BRASS	6u" GOLD PLATING OVER NICKEL PLATING
J	BODY	1	NYLON+33%GF	BLACK
I	HEAT SHRINK TUBE	12	125° 300V L=10mm	BLACK
H	INNER MOLD	1	PVC	BLACK
G	OVER MOLD	1	TPU	BLACK
F	FEMALE PIN	6	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
E	BODY	1	NYLON+33%GF	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+33%GF	BLACK
B	MALE PIN	6	BRASS	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1'	
X.XX	:±0.2			
Singapore Enterprise Co., Ltd. 信亨企業股份有限公司				
TITLE: CIRCULAR STANDARD SERIES ADAPTOR				
DWN	Shawn	PART NO.	2CT303Y-W04400	
CHKD	Quan	SCALE	2:1	UNIT: mm
APVD	Max	SIZE: A3	SHEET: 1 OF 1	REV: B
CUSTOMER COPY				