

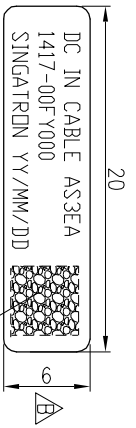
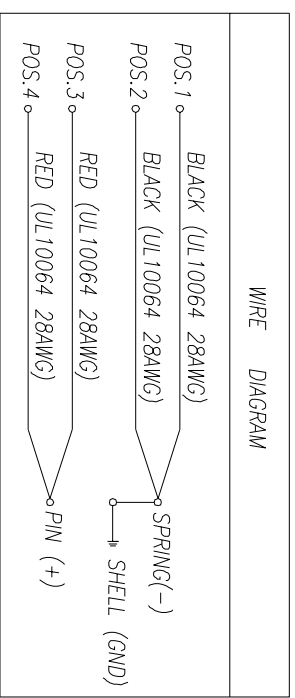
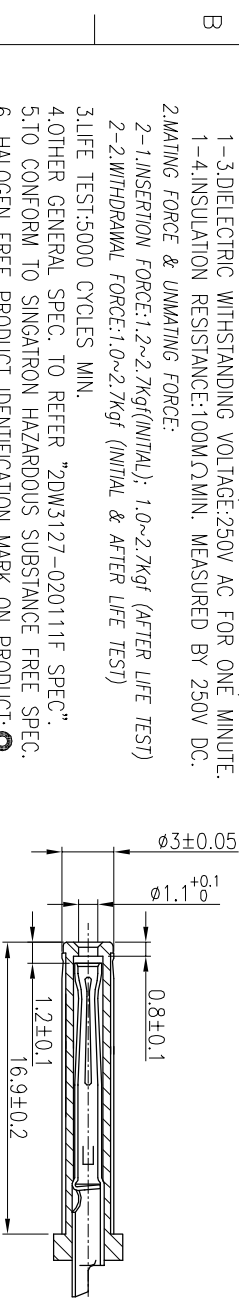
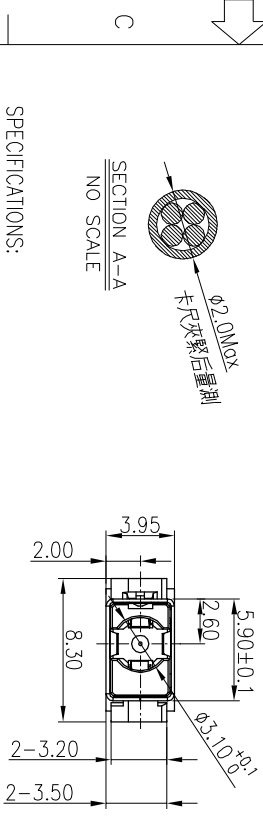


REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T161117-5A	Wenshuo	2017.08.08
B	ECN NO.:S180930-C	Sugar	2018.12.04

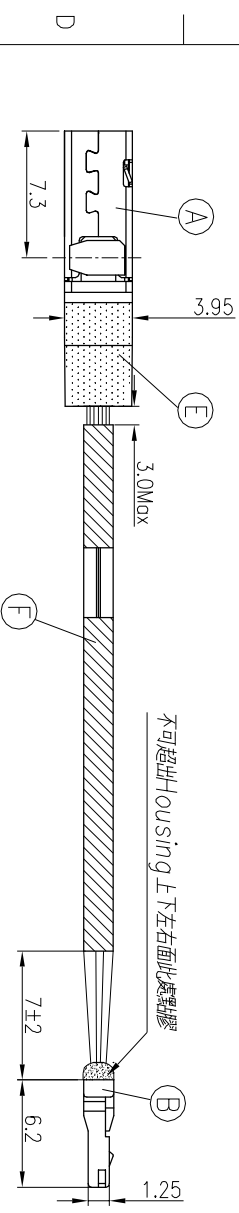

二維碼信息內容為：
1417-00FY000WMD0001

SERIAL NO.(0~9A~Z)
DATE CODE
PEGA P/N

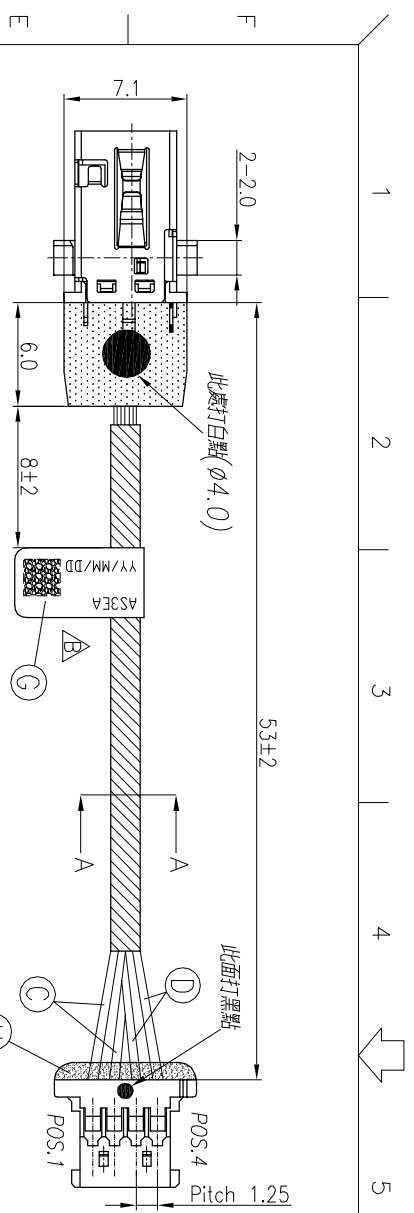

SPECIFICATIONS:

- 1.ELECTRICAL CHARACTERISTICS:
- 1-1.RATING:45W(20V 2.25A)
 - 1-2.CONTACT RESISTANCE:30m ΩMAX.(ONLY FOR DC JACK)
 - 1-3.DIELECTRIC WITHSTANDING VOLTAGE:250V AC FOR ONE MINUTE.
 - 1-4.INSULATION RESISTANCE:100MΩMIN. MEASURED BY 250V DC.
- 2.MATING FORCE & UNMATING FORCE:
- 2-1.INSERTION FORCE:1.2~2.7kgf(INITIAL): 1.0~2.7kgf (AFTER LIFE TEST)
 - 2-2.WITHDRAWAL FORCE:1.0~2.7kgf (INITIAL & AFTER LIFE TEST)
- 3.LIFE TEST:5000 CYCLES MIN.
 - 4.OTHER GENERAL SPEC. TO REFER "2DW3127-020111F SPEC."
 - 5.TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - 6. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT:
 - 7. HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKAGING:
 - 8. PRINTED DATE CODE" " ON TOP OF CONNECTOR.
- DATE CODE:""(YY:YEAR MM:MONTH DD:DAY)

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	DC POWER JACK	1	TO SEE SINGATRON DC JACK P/N:2DC3127-000111F	
B	CONNECTOR (50280-004H0-001)	1	NYLON66 UL94V-0	WHITE
C	WIRE	2	UL10064 28AWG	BLACK
D	WIRE	2	UL10064 28AWG	RED
E	MACROMELT	0.5g	MACROMELT 6208	AMBER
F	ACETATE CLOTH TAPE	1	W10*10.12	BLACK
G	LABEL	1	W6*120 PET	WHITE
H	UV膠	0.5g	8860	WHITE

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.5 X :±2°

X.X :±0.3 X.X :±1'

X.XX :±0.2

TITLE DC JACK CABLE

DWN Sugar PART NO.2DW3127-020111F

CHKD Spring SCALE:-- UNIT: mm

APVD Lussen SIZE: A3 SHEET:1 OF 1 REV: B

CUSTOMER COPY

Singatron Enterprise Co., Ltd.
信晉企業股份有限公司