



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S150625-2B		Vicky	2015.06.18
B	ECN NO.: S151212-C		Vicky	2016.03.16
C	ECN NO.: S160801-R		Horlen	2016.08.01

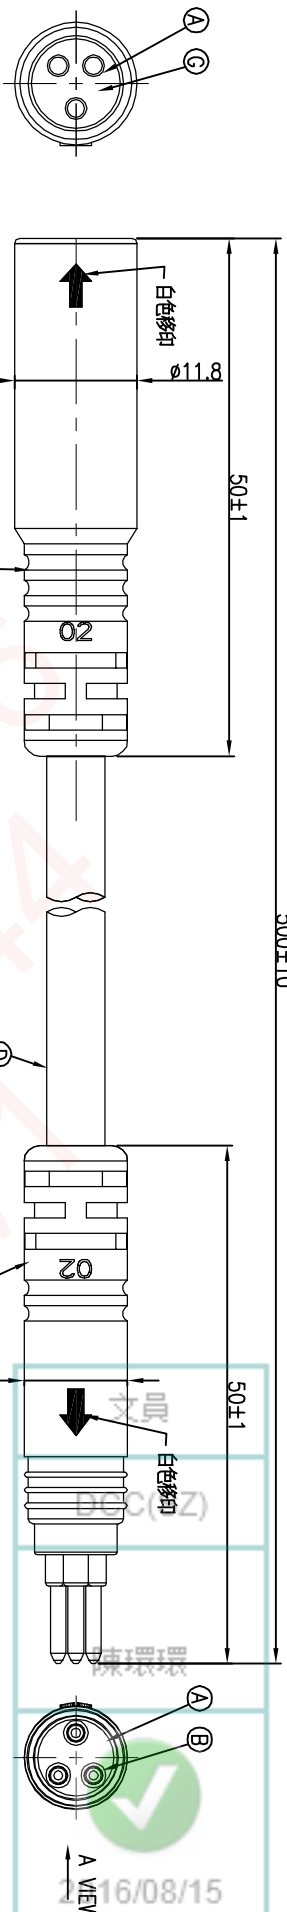

3	YELLOW	3
2	BLUE	2
1	GREEN	1
CONN.1		CONN.2
WIRE COLOR		PIN OUT

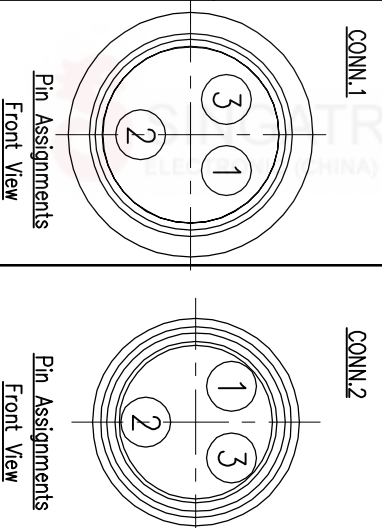

NOTES:

1. WATERPROOF RATE: IP65
2. CURRENT RATING: 10A
3. CONTACT RESISTANCE: 3 Ohm Max.
4. HI-POT TEST 800V AC, 5mA(1SEC)
5. INSULATION RESISTANCE: 30Mohm MIN. BY 500V DC
6. SPECIFICATIONS:SEE "E-BIKE SERIES SPECIFICATIONS."
7. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
8. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

I	OVER MOLD	1	TPU	BLACK
H	INNER MOLD	1	ABS	NATURAL
G	FEMALE PIN	3	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
F	CAP	1	PA66	NATURAL
E	INNER MOLD	1	PVC	BLACK
D	CABLE	1	16#*3C Ø5.6	BLACK(PVC JACKET)
C	OVER MOLD	1	HYTREL	BLACK
B	MALE PIN	3	BRASS	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	2	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.  
信營企業股份有限公司

DECIMALS:	ANGLES:
X :±0.5	X :±2
X.X :±0.3	X.X :±1
X.XX :±0.2	

TITLE E-BIKE SERIES 180° 3 PIN CONN.

DWN Vicky PART NO. 2EB3004-W03433H

CHKD Horlen SCALE 2:1 UNIT: mm

APVD Steve SIZE: A3 SHEET: 1 OF 1 REV: C

CUSTOMER COPY