

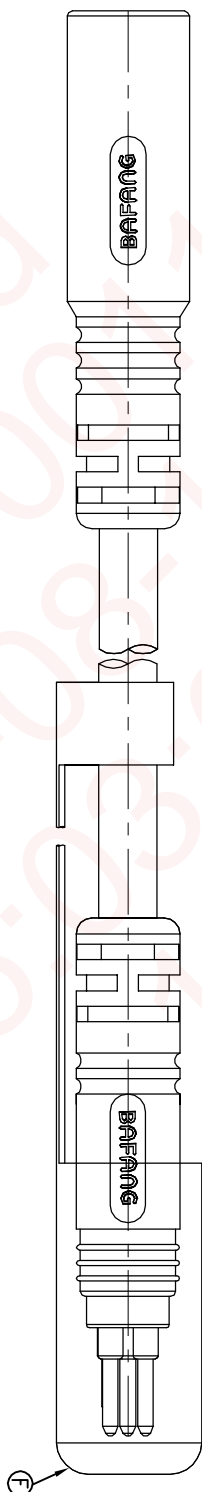

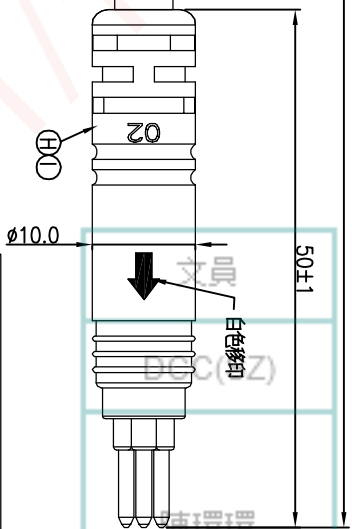
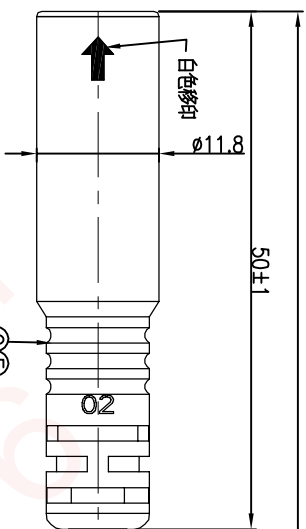



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S150730-17A	Vcky	2015.07.28	
B	ECN NO.: S151212-C	Vcky	2016.03.17	
C	ECN NO.: S160801-R	Harlen	2016.08.01	



Wire Color	CONN.1	CONN.2
YELLOW		3
BLUE		2
GREEN	1	1
WIRE COLOR	CONN.1	CONN.2
PIN OUT		



NOTES:

1. WATERPROOF RATE: IP65
2. CURRENT RATING: 10A
3. CONTACT RESISTANCE: 3 Ohm Max.
4. HI-POT TEST 800V AC, 5mA(1SEC)
5. INSULATION RESISTANCE: 30Mohm MIN. BY 500V DC
6. SPECIFICATIONS:SEE "E-BIKE SERIES SPECIFICATIONS."
7. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
8. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

Item	Description	Material	Quantity	Color
I	OVER MOLD	TPU	1	BLACK
H	INNER MOLD	ABS	1	NATURAL
G	FEMALE PIN	Phosphor Bronze	3	1~3u" GOLD PLATING OVER NICKEL PLATING
F	CAP	PA66	1	NATURAL
E	INNER MOLD	PVC	1	BLACK
D	CABLE	16#*3C 05.6	1	BLACK(PVC JACKET)
C	OVER MOLD	HYTREL	1	BLACK
B	MALE PIN	BRASS	3	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	PA66+GF	2	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

Decimals	Angles
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

Singatron Enterprise Co., Ltd.
信管企業股份有限公司

TITLE E-BIKE SERIES 180° 3 PIN CONN.

DWN Vcky PART NO. 2EB3004-W03438H

CHKD Harlen SCALE 2:1 UNIT: mm

APVD Steve SIZE: A3 SHEET: 1 OF 1 REV: C

CUSTOMER COPY