

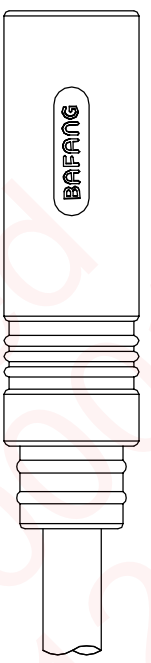


REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S160829-5A		Vcky	2016.08.30
B	ECN NO.:S161148-C		Vcky	2016.11.29

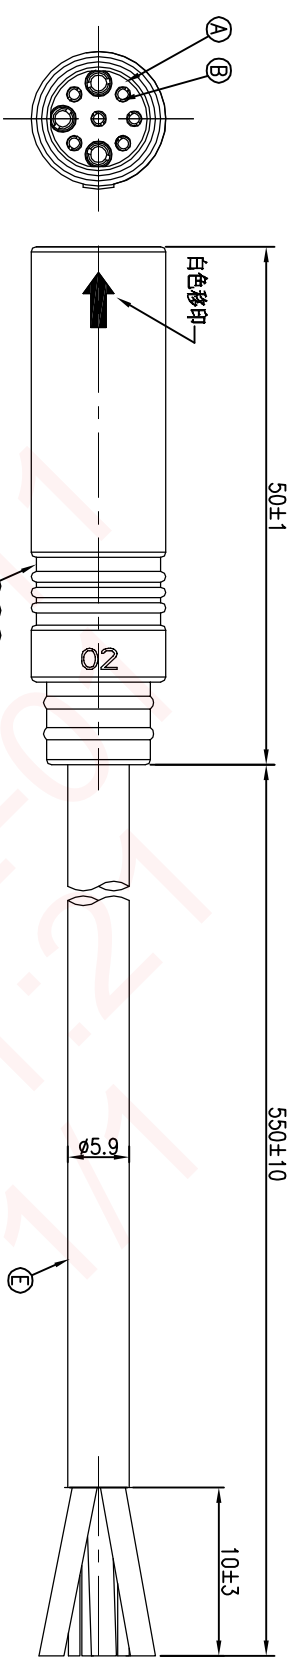

9	BLACK
8	RED
7	BLUE
6	YELLOW
5	GREEN
4	WHITE
3	GREEN(16#)
2	BLUE(16#)
1	YELLOW(16#)
CONN.1 WIRE COLOR	
PIN OUT	



- NOTES:
1. WATERPROOF RATE: IP65
 2. CURRENT RATING: 10A+5A
 3. CONTACT RESISTANCE: 3 Ohm Max.
 4. HI-POT TEST 800V AC, 5mA(1SEC)
 5. INSULATION RESISTANCE: 30M Ω MIN. BY 500V DC
 6. SPECIFICATIONS:SEE "E-BIKE SERIES SPECIFICATIONS".
 7. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 8. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

G	SHRINK TUBE	3	ϕ 2.5mm 300V	BLACK
F	SHRINK TUBE	6	ϕ 1.5mm 300V	BLACK
E	INNER MOLD	1	PVC	BLACK
D	CABLE	1	16#*3C+24#*6C OD5.9	BLACK(PVC JACKET)
C	OVER MOLD	1	HYTREL	BLACK
B	FEMALE PIN	9	Phosphor Bronze	1~3 μ " GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X : \pm 0.5 X : \pm 2°

X.X : \pm 0.3 X.X : \pm 1°

X.XX : \pm 0.2

Singatron Enterprise Co., Ltd.
信管企業股份有限公司

TITLE E-BIKE SERIES 180" 9 PIN CONN.

DWN Vcky PART NO.2EB3004-W09749H

CHKD Harden SCALE 2:1 UNIT: mm

APVD Steve SIZE: A3 SHEET:1 OF 1 REV: B

CUSTOMER COPY

