

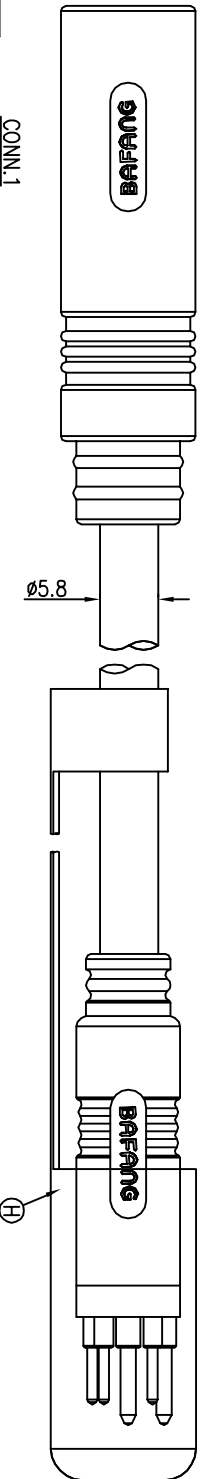


REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A171011-2A	Wcky	2017.10.17

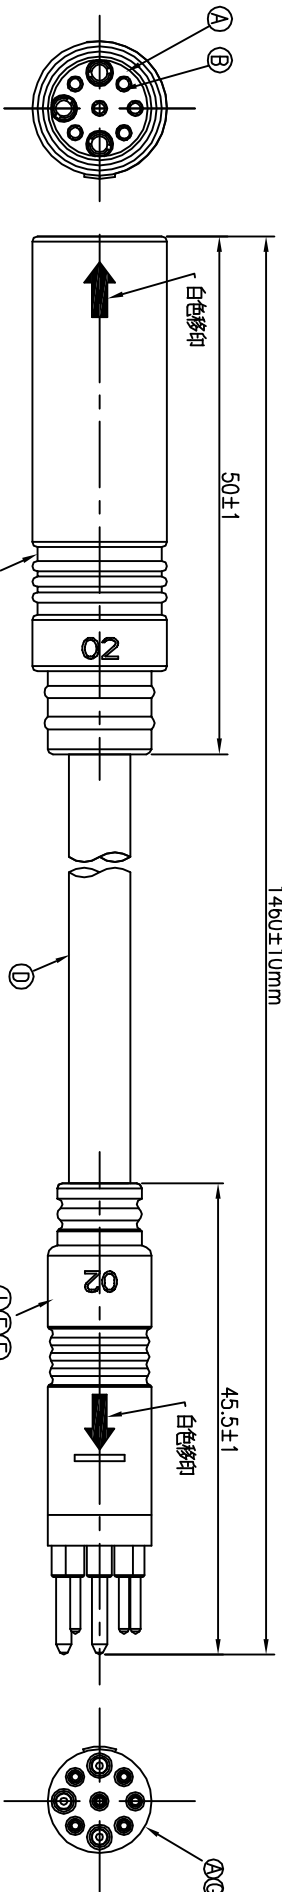

9	BLACK	9
8	RED	8
7	BLUE	7
6	YELLOW	6
5	GREEN	5
4	WHITE	4
3	GREEN(16#)	3
2	BLUE(16#)	2
1	YELLOW(16#)	1
CONN.1 WIRE COLOR		CONN.2
PIN OUT		

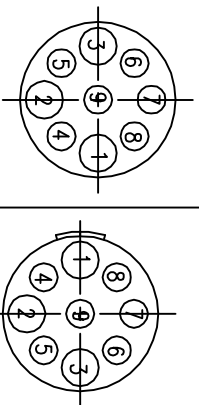

- NOTES:
1. WATERPROOF RATE: IP65
  2. CURRENT RATING: 10A+5A
  3. CONTACT RESISTANCE: 3 Ohm Max.
  4. HI-POT TEST 800V AC, 5mA(1SEC)
  5. INSULATION RESISTANCE: 30Mohm MIN. BY 500V DC
  6. SPECIFICATIONS:SEE "E-BIKE SERIES SPECIFICATIONS".
  7. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  8. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

1	OVER MOLD	1	TPU	BLACK
H	CAP	1	NYLON	NATURAL
G	MALE PIN	9	BRASS	1~3u" GOLD PLATING OVER NICKEL PLATING
F	SHRINK TUBE	12	ø1.5mm 300V	BLACK
E	INNER MOLD	2	PVC	BLACK
D	CABLE	1	1.2mm*3C+0.2mm*6C	BLACK(PVC JACKET)
C	OVER MOLD	1	HYREL	BLACK
B	FEMALE PIN	9	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	2	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.5 X :±2°

X.X :±0.3 X.X :±1°

X.XX :±0.2 X.XX :±1°

TITLE	E-BIKE SERIES 180° 9 PIN CONN.
DWN	Wcky
CHKD	JF
APVD	Steve
PART NO.	2BB3004-W09796H
SCALE	2:1
UNIT	mm
SHEET	1 OF 1
REV	A

Singatron Enterprise Co., Ltd.  
信營企業股份有限公司