

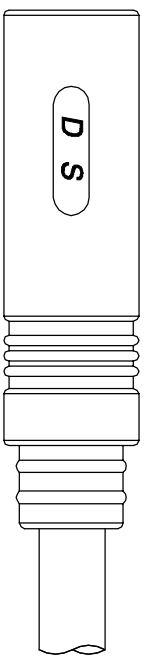


REV	ECN NO	OR	DESCRIPTION	REVISED	DATE
A	PDR	NO.:	A190121-3D	Vcky	2019.01.24

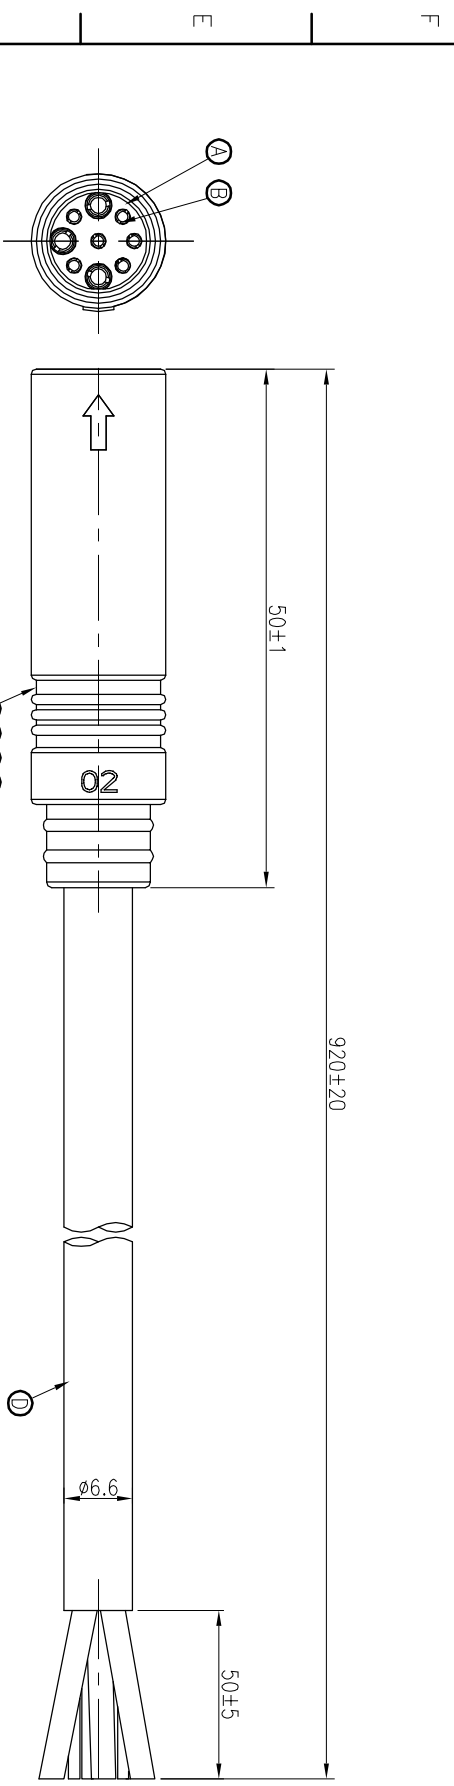

9	BLACK
8	RED
7	BLUE
6	YELLOW
5	GREEN
4	WHITE
3	GREEN(1.5mm ²)
2	BLUE(1.5mm ²)
1	YELLOW(1.5mm ²)
CONN.1 WIRE COLOR	
PIN OUT	



Pin Assignments
Front View

- NOTES:
1. WATERPROOF RATE: IP65
 2. CURRENT RATING: 10A+5A
 3. CONTACT RESISTANCE: 3 Ohm Max.
 4. HI-POT TEST 800V AC, 5mA(1SEC)
 5. INSULATION RESISTANCE: 30Mohm MIN. BY 500V DC
 6. SPECIFICATIONS:SEE "E-BIKE SERIES SPECIFICATIONS".
 7. TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 8. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

G	SHRINK TUBE	3	φ2.5mm 300V	BLACK
F	SHRINK TUBE	6	φ1.5mm 300V	BLACK
E	INNER MOLD	1	PVC	BLACK
D	CABLE	1	KEFR 3C*1.5mm ² + 6C*0.2mm ² ,OD:6.6mm	BLACK(PVC JACKET)
C	OVER MOLD	1	TPU	BLACK
B	FEMALE PIN	9	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信管企業股份有限公司	
DECIMALS:	ANGLES:	TITLE E-BIKE SERIES 180° 9 PIN CONN.	
X :±0.5	X :±2°	DWN	Vcky
X.X :±0.3	X.X :±1°	CHKD	JF
X.XX :±0.2		APVD	William
CUSTOMER COPY			