




REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S150629-8A		Vicky	2015.06.26




MALE CONN.2
WATERPROOF RATE: IP67

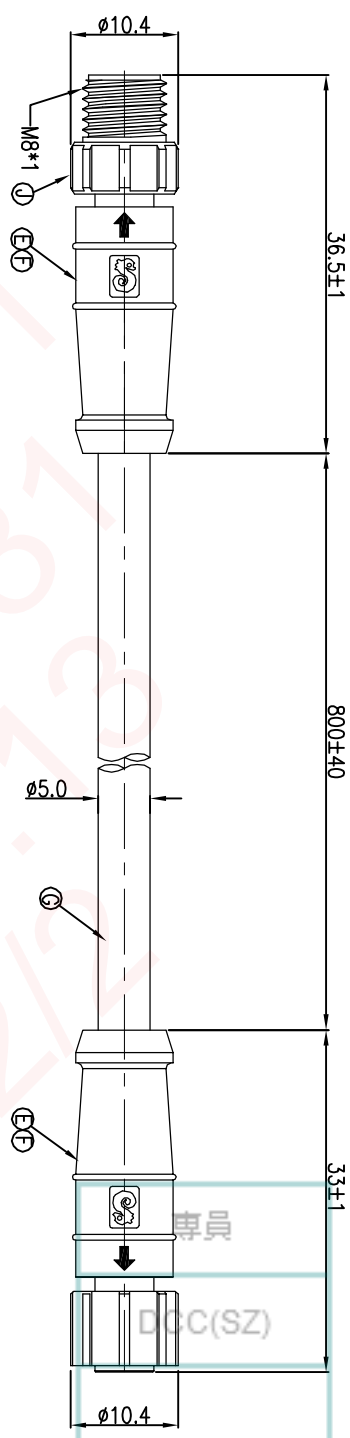

FEMALE CONN.1
WATERPROOF RATE: IP67

3	RED	3
1	BLACK	1
CONN.1 WIRE COLOR		CONN.2
PIN OUT		
FEMALE CONN.1		MALE CONN.2

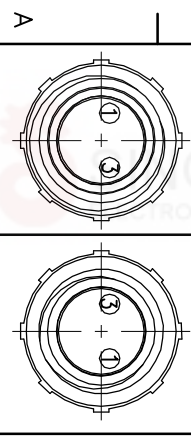

PIN ASSIGNMENTS
FRONT VIEW

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
 2. ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -20°C TO +80°C
RATING: 60V AC/DC 5A
 3. SPECIFICATIONS:SEE "M8 SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

J	MALE SCREW NUT	1	NYLON+GF	BLACK
I	MALE PIN	2	BRASS	6u" GOLD PLATING OVER NICKEL PLATING
H	BODY	1	TPU	BLACK
G	CABLE	1	UL2464 20#*2C+AL UV OD=φ5.0	BLACK(PVC JACKET)
F	UV GLUE	2	N/A	NATURAL
E	OVER MOLD	2	TPU	BLACK
D	FEMALE SCREW NUT	1	PA66	BLACK
C	O-RING	1	WITON	RED
B	FEMALE PIN	2	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	TPU	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.5 X :±2
X.X :±0.3 X.X :±1'
X.XX :±0.2

Singatron Enterprise Co., Ltd.
信譽企業股份有限公司

TITLE M8 SERIES FEMALE CONN. AND MALE CONN.(2PIN)

DWN Vicky PART NO.2ME3010-W02324H
CHKD Horten SCALE 2:1 UNIT: mm
APVD Steve SIZE: A3 SHEET:1 OF 1 REV: A

CUSTOMER COPY