



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO:TT51030-3B	Vicky	2015.11.03	

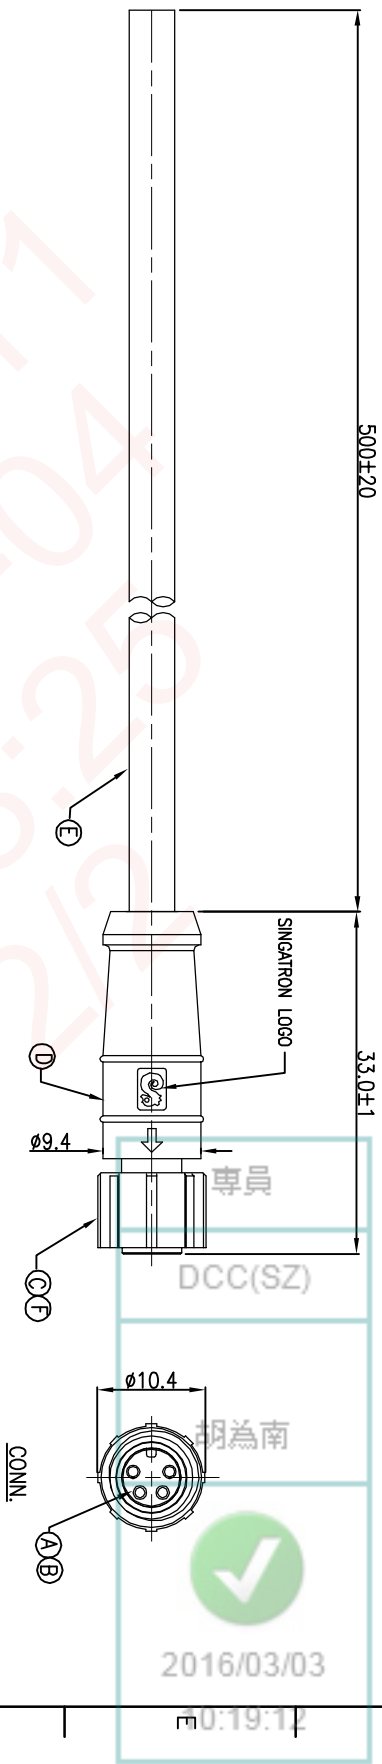

YELLOW	4
RED	3
GREEN	2
WHITE	1
WIRE COLOR	CONN.



PIN ASSIGNMENTS
FRONT VIEW

NOTES:

1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
2. ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -20°C TO +80°C
RATING: 60V AC/DC 5A
3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
SPECIFICATIONS: SEE "M8 SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

F	0-RING	1	SILICON	RED
E	CABLE	1	UL2464 24#*4C+A OD:4.4(VV)	BLACK(PVC JACKET)
D	OVER MOLD	1	TPU	BLACK
C	NUT	1	PA66	BLACK
B	FEMALE PIN	4	Phosphor Bronze	GOLD PLATING OVER NICKEL PLATING
A	BODY	1	TPU	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE: M8 SERIES FEMALE CONN. (4PIN)				
DWN Vicky PART NO. 2MB3010-W04325H				
CHKD Harlen SCALE 2:1 UNIT: mm				
APVD Steve SIZE: A3 SHEET: 1 OF 1 REV: A				
CUSTOMER COPY				

Singatron Enterprise Co., Ltd.
信譽企業股份有限公司