




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T151022-3A	Vicky	2016.05.20

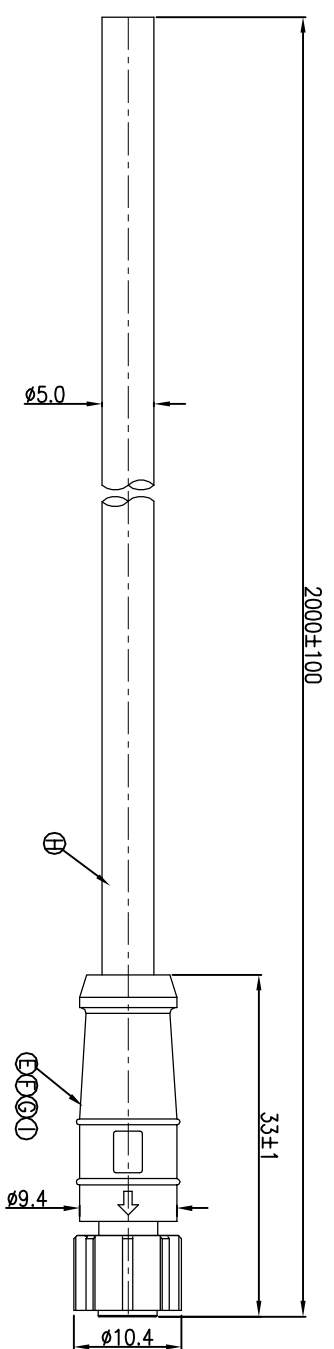

CONN.  
WATERPROOF RATE: IP67

5	PINK
4	WHITE
3	BLUE
2	GREEN
1	YELLOW
CONN1.	WIRE COLOR
B	PIN OUT
	CONN.



PIN ASSIGNMENTS  
FRONT VIEW

- NOTES:
1. WATERPROOF RATE: IP67  
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
  2. ELECTRICAL CHARACTERISTICS  
TEMPERATURE RANGE: -40°C TO +80°C  
RATING: 60V AC/DC 2A
  3. SPECIFICATIONS: SEE "M8 SERIES SPECIFICATIONS".
  4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

1	INNER MOLD	1	TPU	NATURAL
H	CABLE	1	UL2464 24#*5C+AL UV OD=5.0	WHITE(PVC JACKET)
G	UV GLUE	1	N/A	NATURAL
F	SHRINK TUBE	5	1.5*7mm	BLACK
E	OVER MOLD	1	羅游族TPU DP83095A 色粉 SZXY-88247#	WHITE(UV329 )
D	O-RING	1	VITON	RED
C	SCREW NUT	1	PA66+25%GF	WHITE
B	FEMALE PIN	5	Phosphor Bronze	1u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	TPU(SZXY-88247#色粉) MATERIAL	WHITE PLATING & COLOR
NO	DESCRIPTION	QTY		

UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE		M8 SERIES FEMALE CONN. (5PIN)	
DECIMALS:	ANGLES:	DWN	Vicky	PART NO.	2MB3010-W05242H
X.XX :±0.5	X.XX :±2°	CHKD	Harlen	SCALE	2:1
X.XX :±0.3	X.XX :±1°	APVD	Steve	UNIT:	mm
X.XX :±0.2				SHEET:	1 OF 1
				REV:	A
CUSTOMER COPY					

Singatron Enterprise Co., Ltd.  
信營企業股份有限公司