




REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:171204-1E		Jun	2018.01.15
B	ECN NO.:A180708-R		Jun	2018.07.24

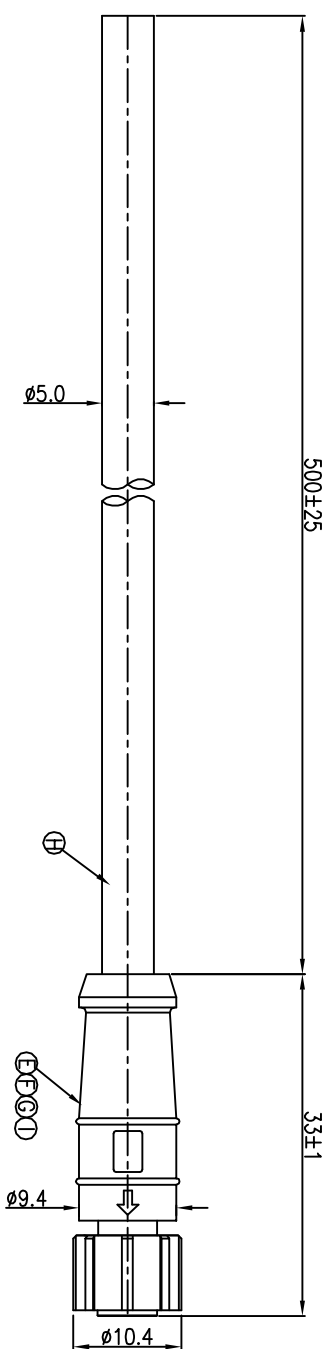

CONN.  
WATERPROOF RATE: IP67

5	PINK
4	WHITE
3	BLUE
2	GREEN
1	YELLOW
CONN1.	WIRE COLOR
PIN OUT	
CONN.	



PIN ASSIGNMENTS  
FRONT VIEW

- NOTES:
1. WATERPROOF RATE: IP67  
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
  2. ELECTRICAL CHARACTERISTICS  
TEMPERATURE RANGE: -20°C TO +80°C  
RATING: 60V AC/DC 2A
  3. SPECIFICATIONS:SEE "M8 SERIES SPECIFICATIONS".
  4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
I	INNER MOLD	1	TPU	NATURAL
H	CABLE 客供 $\Delta$	1	UL2464 24#*SC+AL UV OD=5.0	WHITE(PVC JACKET)
G	UV GLUE	1	N/A	NATURAL
F	SHRINK TUBE	5	$\phi$ 1.5*7mm	BLACK
E	OVER MOLD	1	脂肪族 TPU DP83095A 色粉 SZXY-88247#	WHITE(UV329 )
D	O-RING	1	VITON	RED
C	SCREW NUT	1	PA66+25%GF	WHITE
B	FEMALE PIN	5	Phosphor Bronze	1u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	TPU(SZXY-88247#色粉)	WHITE
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X.XX :±0.5 X.X :±2  
X.XX :±0.3 X.X :±1°  
X.XX :±0.2

Singatron Enterprise Co., Ltd.  
信營企業股份有限公司

M8 SERIES FEMALE CONN. (5PIN)

PART NO. 2ME3010-W05259H

SCALE 2:1 UNIT: mm

SIZE: A3 SHEET: 1 OF 1 REV: B

CUSTOMER COPY