


REV.	ECH NO OR DESCRIPTION	REVISED	DATE
A	PDR NO:1200206-1A~1D ZMT3010-W12219-2ZH=>ZMT3010-W08270H*73H	JAY	2020.04.26

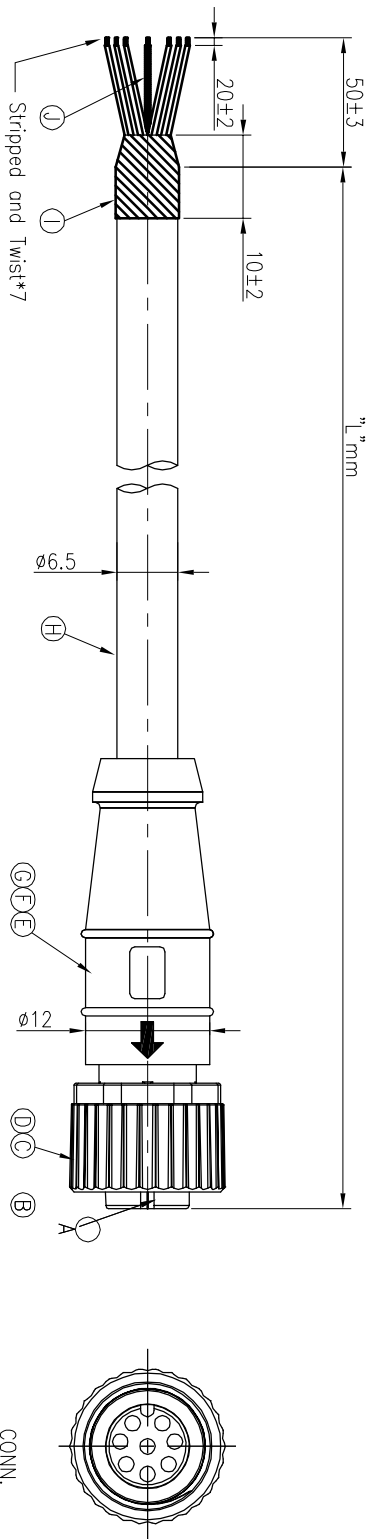


DELTA PART NO	REV.	PART NO	"L" mm
3081909400	00	ZMT3010-W08270H	L=2500±50
3081909500	00	ZMT3010-W08271H	L=3500±50
3081909600	00	ZMT3010-W08272H	L=5000±50
3081909700	00	ZMT3010-W08273H	L=10000±100

NOTES:

1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
2. RATING:DC 30V
3. The substances must meet RoHS & Delta standard 10000-0162 5.1.30
4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
5. HI-POT TEST 500VAC/5A

DRAN	7	8
PINK	6	
PINK/WHITE	5	
ORANGE/WHITE	4	
ORANGE	3	
BLUE	2	
BROWN	1	
WIRE COLOR	CONN.	
PIN OUT		



Pin Assignments
Front View

J	HEAT SHRINK TUBE	1	Ø0.8mm 300V 125°C	GREEN
I	HEAT SHRINK TUBE	1	Ø8mm 300V 125°C	BLACK
H	CABLE	1	PVC UL20276 26AWG*6C+AE8	GRAY
G	HEAT SHRINK TUBE	7	Ø1.5mm 300V 125°C	BLACK
F	INEER MOLD	1	TPU	BLACK
E	OVER MOLD	1	TPU	BLACK
D	O-RING	1	VITON	RED
C	SCREW NUT	1	PA66+GF	BLACK
B	FEMALE PIN	8	C5210-EH,T=0.15mm	Au 6u" Over Nickel Plating
A	BODY	1	TPU	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.5 X :±2°
X.X :±0.3 X.X :±1°
X.XX :±0.2

Suzhou Singatton Auto Electronics CO.,LTD.
蘇州信通汽車電子有限公司

M12 SERIES 180° 8PIN FEMALE CONN.

DWN JAY PART NO:ZMT3010-W0827XH
CHKD Carry SCALE 2:1 UNIT: mm
APVD William SIZE: A3 SHEET:1 OF 1 REV: A

CUSTOMER COPY