



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S161223-5A&S170418-5G~H	Vicky	2017.04.14

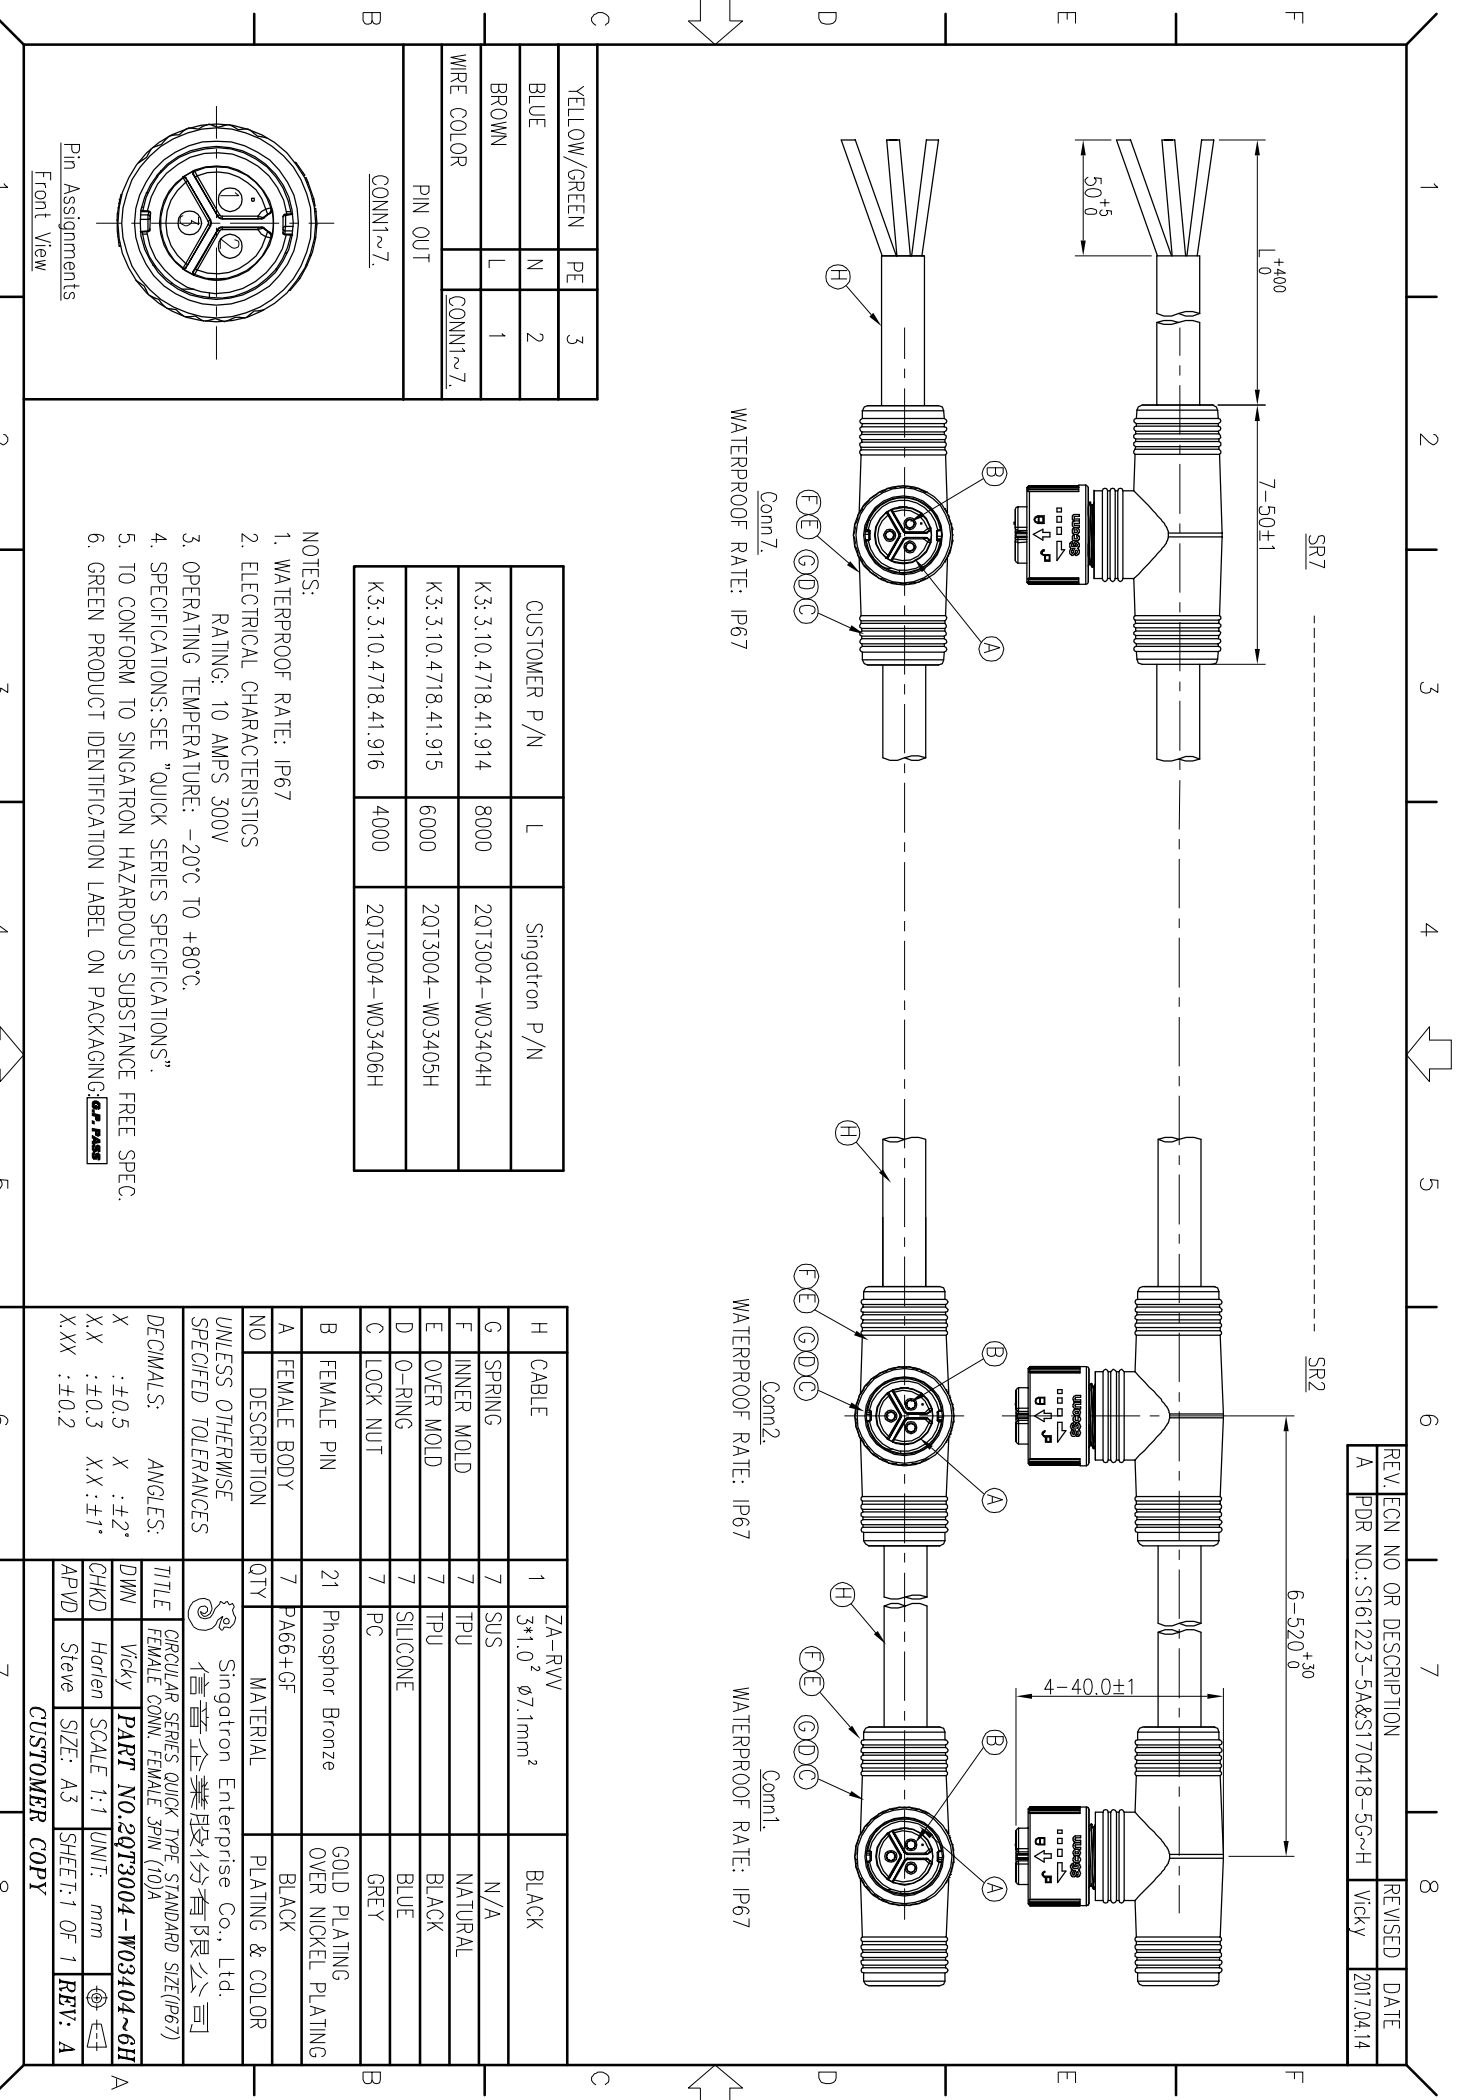

YELLOW/GREEN	PE	3
BLUE	N	2
BROWN	L	1
WIRE COLOR		CONN1~7.
PIN OUT		
CONN1~7.		



CUSTOMER P/N	L	Singatron P/N
K3.3.10.4718.41.914	8000	ZQT3004-W03404H
K3.3.10.4718.41.915	6000	ZQT3004-W03405H
K3.3.10.4718.41.916	4000	ZQT3004-W03406H

- NOTES:
1. WATERPROOF RATE: IP67
 2. ELECTRICAL CHARACTERISTICS
RATING: 10 AMPS 300V
 3. OPERATING TEMPERATURE: -20°C TO +80°C.
 4. SPECIFICATIONS: SEE "QUICK SERIES SPECIFICATIONS".
 5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING.

H	CABLE	1	ZA-RVV 3*1.0 ² Ø7.1mm ²	BLACK
G	SPRING	7	SUS	N/A
F	INNER MOLD	7	TPU	NATURAL
E	OVER MOLD	7	TPU	BLACK
D	O-RING	7	SILICONE	BLUE
C	LOCK NUT	7	PC	GREY
B	FEMALE PIN	21	Phosphor Bronze	GOLD PLATING OVER NICKEL PLATING
A	FEMALE BODY	7	PA66+GF	BLACK
NO DESCRIPTION		QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:		ANGLES:		
X	: ±0.5	X	: ±2°	
X.X	: ±0.3	X.X	: ±1'	
X.XX	: ±0.2			
Singatron Enterprise Co., Ltd. 信亨企業股份有限公司				
TITLE: CIRCULAR SERIES QUICK TYPE STANDARD SIZE (IP67) FEMALE CONN. FEMALE 3PIN (10A)				
DWM	Vicky	PART NO.	ZQT3004-W03404~6H	
CHKD	Harlen	SCALE	1:1	UNIT: mm
APVD	Steve	SIZE	A3	SHEET: 1 OF 1
REV: A				
CUSTOMER COPY				