



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.: S170418-5D~5F	Wicky	2017.04.14

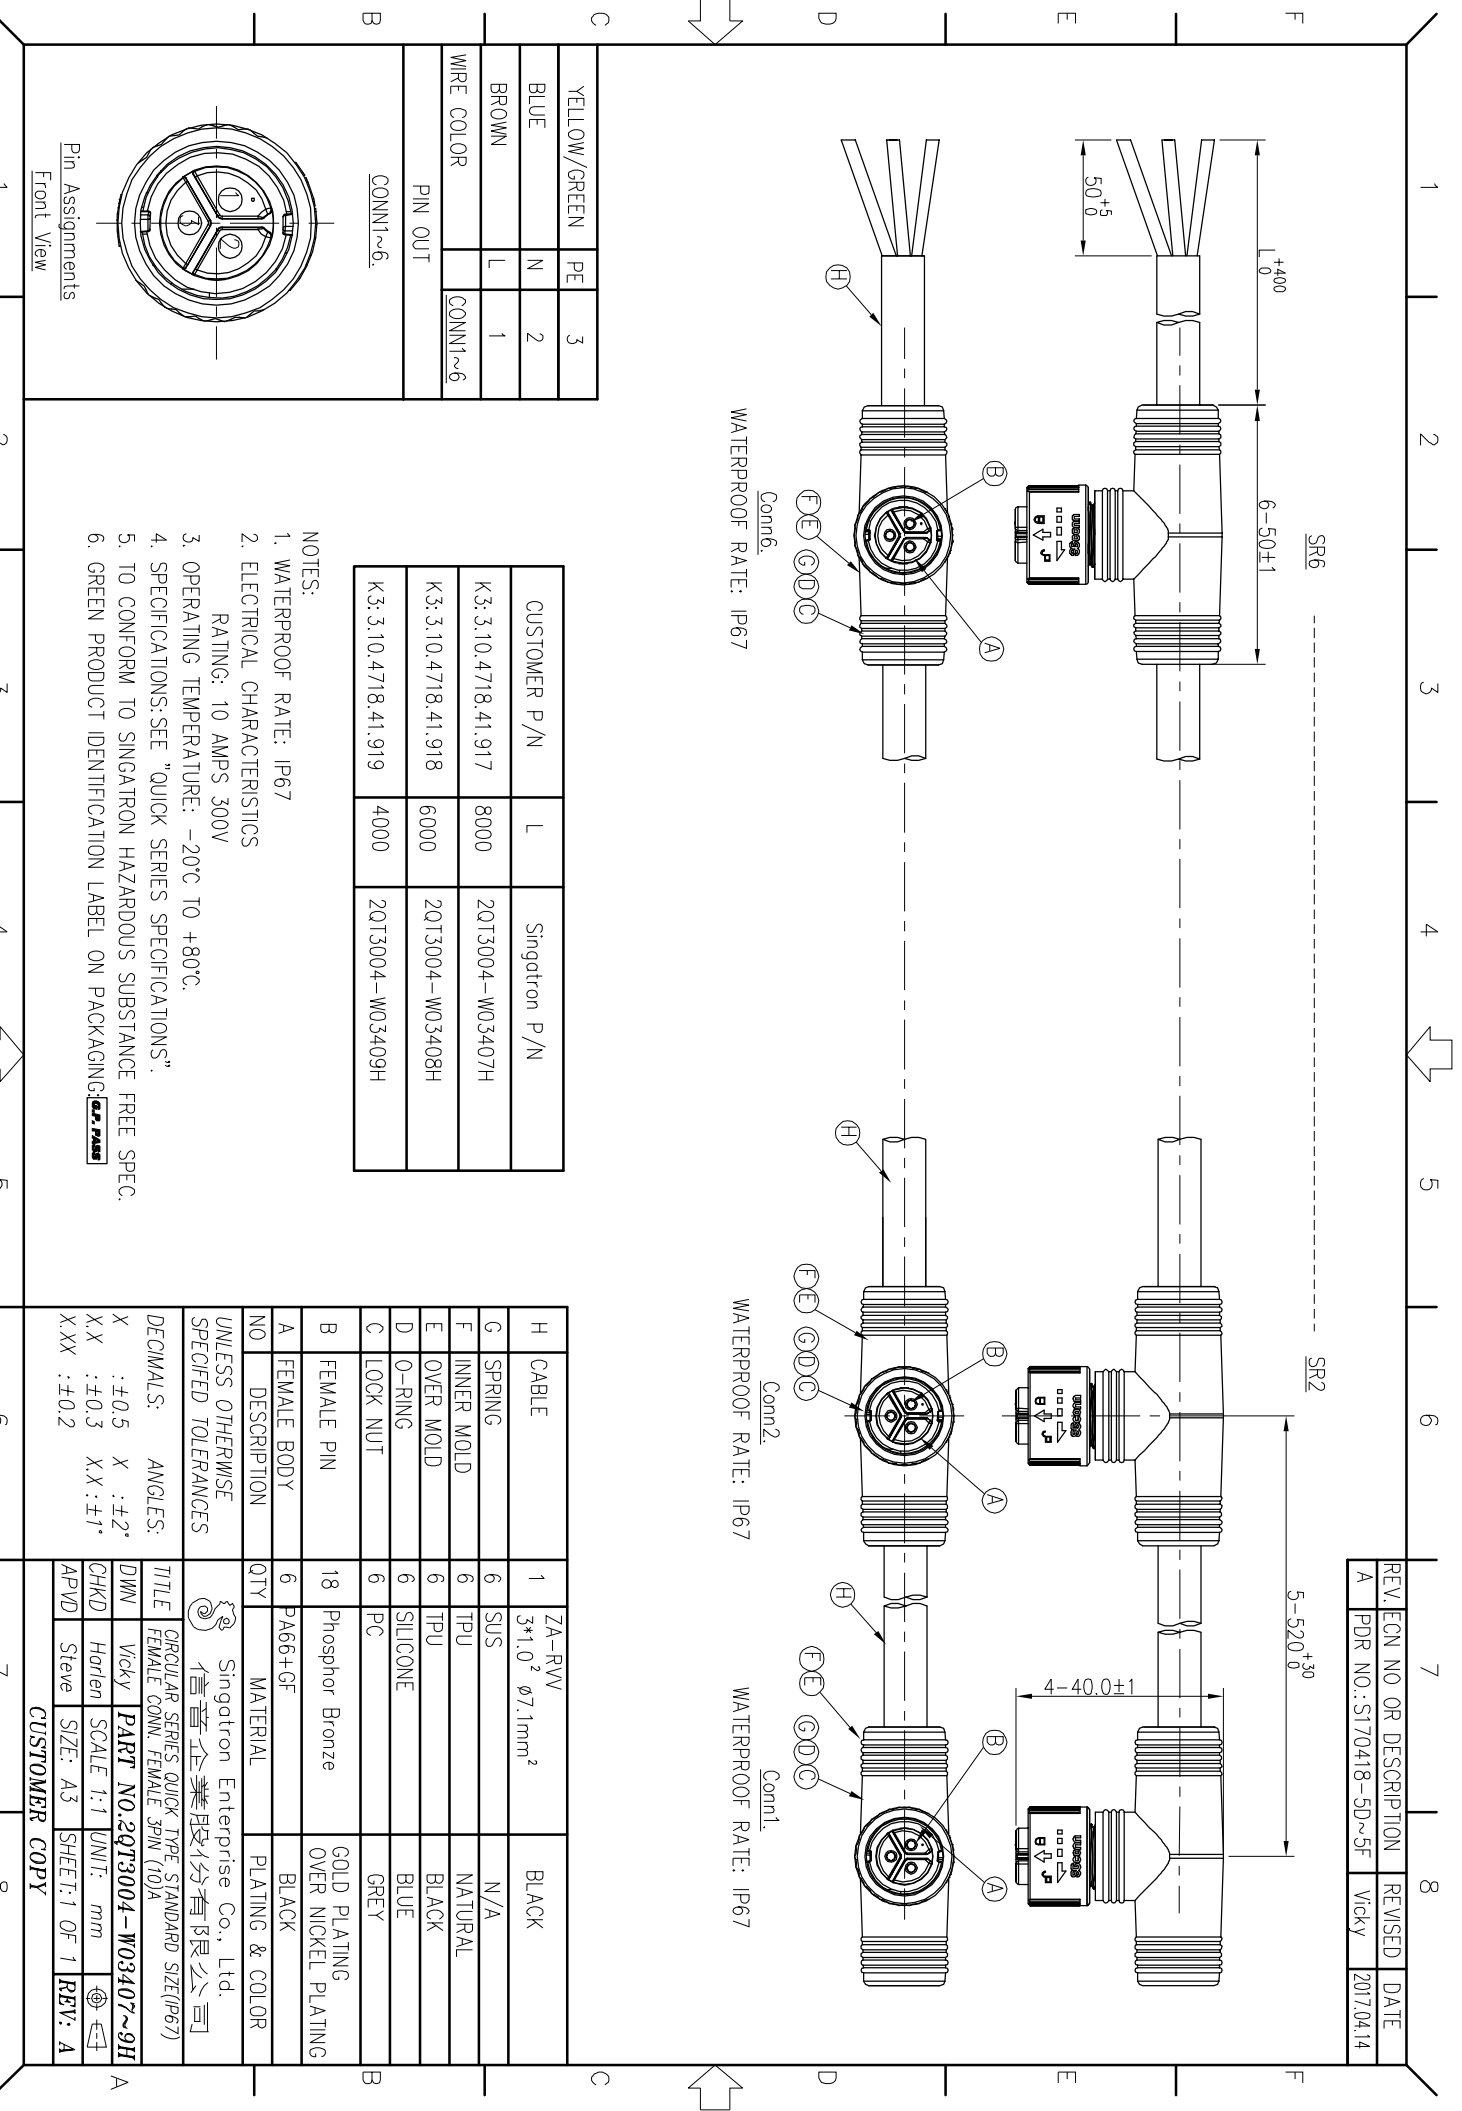

YELLOW/GREEN	PE	3
BLUE	N	2
BROWN	L	1
WIRE COLOR		CONN1~6
PIN OUT		
CONN1~6		

CUSTOMER P/N	L	Singatron P/N
K3.3.10.4718.41.917	8000	20T3004-W03407H
K3.3.10.4718.41.918	6000	20T3004-W03408H
K3.3.10.4718.41.919	4000	20T3004-W03409H

- NOTES:
1. WATERPROOF RATE: IP67
  2. ELECTRICAL CHARACTERISTICS  
RATING: 10 AMPS 300V
  3. OPERATING TEMPERATURE: -20°C TO +80°C.
  4. SPECIFICATIONS: SEE "QUICK SERIES SPECIFICATIONS".
  5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING.



H	CABLE	1	ZA-RVV 3*1.0 <sup>2</sup> Ø7.1mm <sup>2</sup>	BLACK
G	SPRING	6	SUS	N/A
F	INNER MOLD	6	TPU	NATURAL
E	OVER MOLD	6	TPU	BLACK
D	O-RING	6	SILICONE	BLUE
C	LOCK NUT	6	PC	GREY
B	FEMALE PIN	18	Phosphor Bronze	GOLD PLATING OVER NICKEL PLATING
A	FEMALE BODY	6	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.  
信亨企業股份有限公司

TITLE: CIRCULAR SERIES QUICK TYPE STANDARD SIZE (IP67)  
FEMALE CONN. FEMALE 3PIN (10A)

DWG: Wicky PART NO.: 20T3004-W03407~9H  
CHKD: Harlen SCALE 1:1 UNIT: mm  
APVD: Steve SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY