

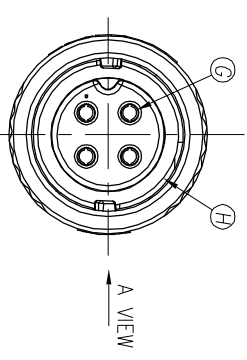


REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A211214-2A	LEI		2022.01.14

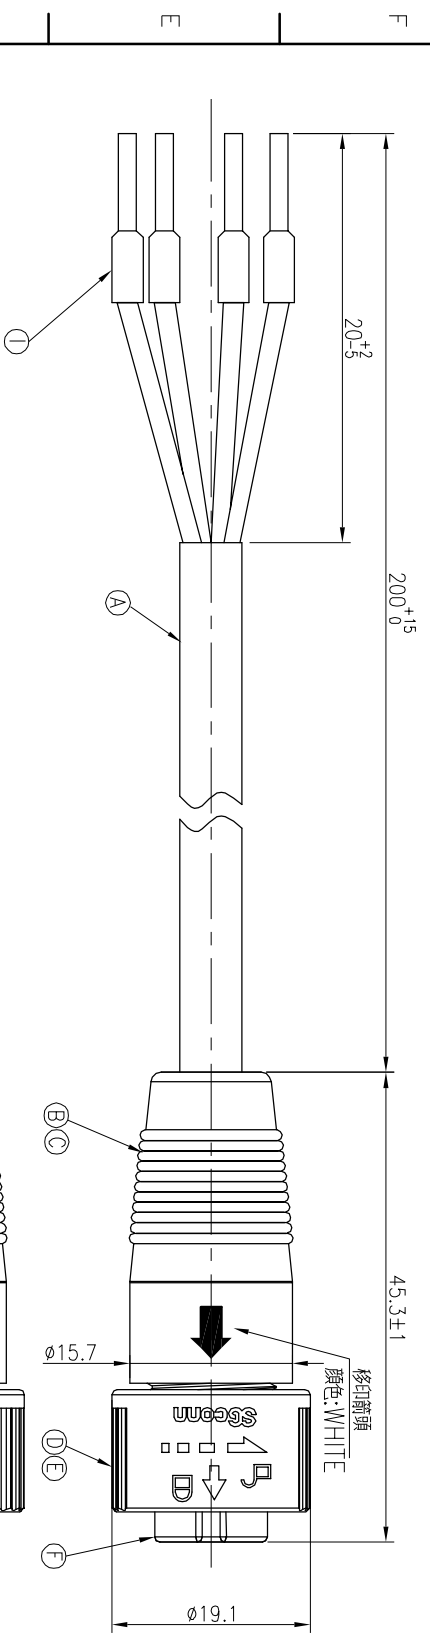


CONN. WATERPROOF RATE: IP67

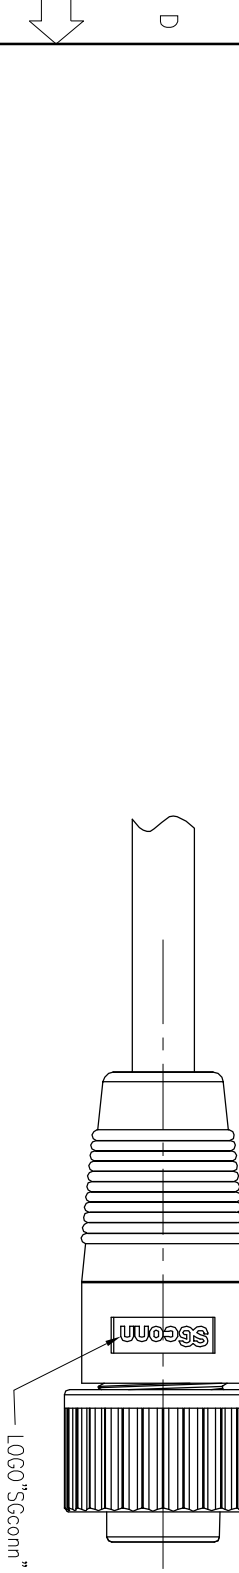

YELLOW&GREEN	4
BLUE	3
BLACK	2
BROWN	1
WIRE COLOR	CONN.
PIN OUT	
CONN.	

Short

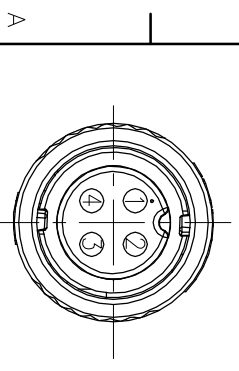

Pin Assignments
Front View

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - 1-1 CURRENT RATING: 10 AMPS.
 - 2-1 OPERATING TEMPERATURE: -40°C TO +60°C.
 - ENVIRONMENTAL:
 - 2-1 SEALING REQUIREMENTS: IP67.
 - 2-2 SEALING REQUIREMENTS: IP67.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
1	TERMINAL (套#)	4	BRASS 1mm ²	N/A
H	O-RING	1	SILICONE	BLUE
G	FEMALE PIN	4	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
F	BODY	1	PA66	BLACK
E	SPRING	1	SUS	N/A
D	LOCK NUT	1	PC	GREY
C	INNER MOLD	1	TPU	BLACK
B	OVER MOLD	1	TPU	BLACK
A	CABLE (套#)	1	H05RN-F 4*0.75mm ²	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

Suzhou Singatron Auto Electronics CO.,LTD.
苏州信壹汽车电子有限公司

CIRCULAR SERIES QUICK TYPE STANDARD SIZE
FEMALE CONN. FEMALE 4PIN (180° IP67)
TITLE
DWG LEI PART NO. 2QT3004-W04455H
CHKD JY SCALE 2:1 UNIT: mm
APVD JF SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY