



RECOMMENDED P.C.B. LAYOUT T=1.20
TOP VIEW (TOLERANCE: ±0.05)

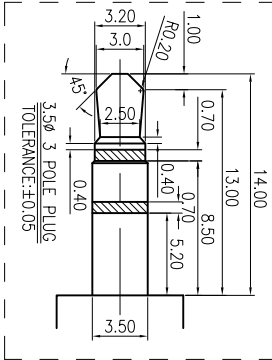

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - RATING: 36V, 1A
 - CONTACT RESISTANCE: 50mΩ MAX
 - INSULATION RESISTANCE: 500V AC FOR ONE MINUTE
 - INSULATION RESISTANCE: 1000V DC MIN. MEASURED BY 500 VDC
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 0.4~3.0 KGf
 - WITHDRAWAL FORCE : 0.3~2.0 KGf
- LIFE TEST: 5,000 CYCLES MIN.
- OTHER GENERAL SPEC. TO REFER "2SJJ2285 SERIES SPEC".
- TO CONFORM TO THE SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN PRODUCT IDENTIFICATION MARK ON JACK: ○
- HALOGEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- PACKAGING:TAPE&REEL.
- P/N INFORMATION:
 - 2SJJ2285-0001X1

— BODY MATERIAL & BODY COLOR
 1:LOP E130I PINK 701C
 2:LOP E130I BLUE 284C
 3:LOP E130I LIME 577C

REV.	ECN NO OR	DESCRIPTION	REVISED	DATE
C	ECN NDC110149-1	Modify Plating specification	BILLY	2011.06.23
D	ECN NDC120058	Modify Shell Shape	BILLY	2012.5.10
E	ECN NDC140074	Modify layout	ZLS	2014.7.22

K	MYLAR	1	T=0.075	
J	MYLAR	1	T=0.075	
I	SHIELD	1		NI PLATING
H	TRANSFER TERMINAL	1	COPPER ALLOY 0.20T	△ Gold Flash on contact area and Solder tail/call over Nickel Plated
G	MAKE TERMINAL	1	COPPER ALLOY 0.20T	△ Gold Flash on contact area and Solder tail/call over Nickel Plated
F	RING	1	COPPER ALLOY 0.20T	△ Gold Flash on contact area and Solder tail/call over Nickel Plated
E	SHUNT	1	COPPER ALLOY 0.20T	GOLD FLASH
D	TIP	1	COPPER ALLOY 0.25T	△ Gold Flash on contact area and Solder tail/call over Nickel Plated
C	EARTH	1	COPPER ALLOY 0.20T	GOLD FLASH
B	METAL	1	COPPER ALLOY 0.20T	NI PLATING
A	BODY	1	HIGH TEMP.THERMO PLASTIC 94V-0	SEE NOTE 10
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X:X	:±0.3	X:X	:±1°	
X:XX	:±0.2			
TITLE: 3.50 PHONE JACK				
DWG: 14/8/14 PART NO. 2SJJ2285-0001X1				
CHKD: BILLY 14/8/14 SCALE 3:1 UNIT: mm				
APVD: kuz 14/8/14 SIZE: A3 SHEET: 10F1 REV: E				
CUSTOMER COPY				

Singatron Enterprise Co., Ltd.
 信亨企業股份有限公司