


RJ45 PLUG  
CONN.2

CONN.1  
WATERPROOF RATE: IP67

SHIELD	DRAIN	SHIELD
1	ORANGE/WHITE	1
2	ORANGE	2
3	GREEN/WHITE	3
4	BLUE	4
5	BLUE/WHITE	5
6	GREEN	6
7	BROWN/WHITE	7
8	BROWN	8
CONN.1	WIRE COLOR	CONN.2

PIN OUT

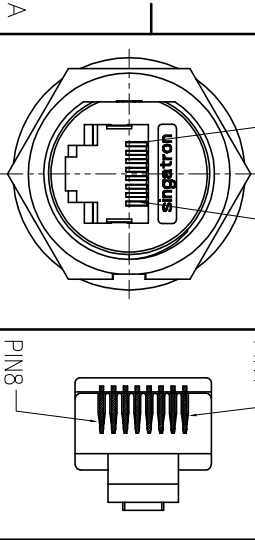


PIN ASSIGNMENTS  
FRONT VIEW

NOTES:

1. WATERPROOF RATE: IP67
2. RATING: 125V 1.5A
3. OTHER GENERAL SPEC. TO REFER "RJ45 SERIES SPEC."
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GF PASS**
6. FOR PANEL THICKNESS MAX OF 5.5mm

A-A SECTION

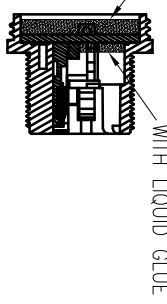

K	TUBE	1	ø1.0 125°C 300V	BLACK
J	RJ45 PLUG	1	8P8C SHIELD	GOLD PLATING
I	CABEL	1	CAT5E FTP 24#*4P+MY+D +A/M UV RESISTANT	BLACK(PVC JACKET)
H	TUBE	2	ø7.0 125°C 300V	BLACK
G	LIQUID GLUE	2	N/A	BLACK
F	SCREW	1	STAINLESS STEEL	N/A
E	GASKET	1	EPDM	BLACK
D	NUT	1	NYLON+GF	BLACK
C	GROUND	2	BRASS	NICKEL PLATING
B	RJ45	1	N/A	GOLD PLATING
A	HOUSING	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信登企業股份有限公司				
DECIMALS:		ANGLES:		
X	:±0.5	X	:±2°	
X X	:±0.3	X X	:±1'	
X:XX	:±0.2			
TITLE: RJ45 FRONT MOUNT CONN.+PLUG				
DWG: Yong				
CHKD: JF				
APVD: Steve				
PART NO.: 2JT3003-W051B1H				
SCALE: 2:1				
UNIT: mm				
SIZE: A3				
SHEET: 1 OF 1				
REV: A				
CUSTOMER COPY				

REV.	EGN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	S:161226-1A	Yong	2017.12.29