


1	ORANGE/WHITE	8	
2	ORANGE	7	
3	GREEN/WHITE	6	
4	BLUE	5	
5	BLUE/WHITE	4	
6	GREEN	3	
7	BROWN/WHITE	2	
8	BROWN	1	
CONN.1 WIRE COLOR		CONN.2	
PIN OUT			
CONN.1		CONN.2	
PIN 1		PIN 8	
PIN 8		PIN 1	

1	TWIST
2	TWIST
3	TWIST
4	TWIST
5	TWIST
6	TWIST
7	TWIST
8	TWIST




WATERPROOF RATE: IP67

REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A190927-1A		Vcky	2019.10.08

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
 2. ELECTRICAL CHARACTERISTICS:
2-1. RATING:125V 1.5A
2-2. CONTACT RESISTANCE: 3 ohm MAX.(INITIAL)
2-3. DIELECTRIC WITHSTANDING VOLTAGE: 300V AC FOR ONE MINUTE
2-4. INSULATION RESISTANCE: 30Mohm MIN. MEASURED BY 300 VDC
 3. OTHER GENERAL SPEC. TO REFER "RJ45 SERIES SPEC."
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 6. FOR PANEL THICKNESS MAX OF 5.5mm

PIN ASSIGNMENTS
FRONT VIEW

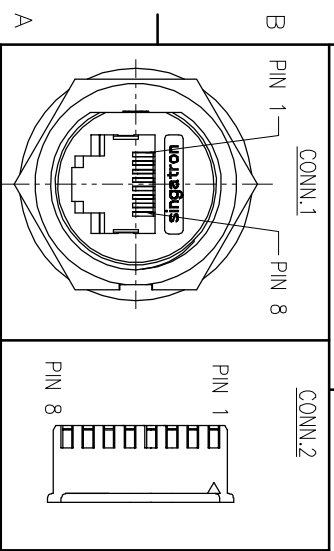

K	TERMINAL	8	JWT A250110P-00	GOLD-PLATED
J	HOUSING	1	JWT A2512H00-8P	WHITE
I	CABEL	1	CAT5E FTP 24#*4P+MY+D +A/M UV RESISTANT	BLACK(PVC JACKET)
H	TUBE	2	Ø7.0 125°C 300V	BLACK
G	LIQUID GLUE	2	N/A	BLACK
F	SCREW	1	STAINLESS STEEL	N/A
E	GASKET	1	EPDM	BLACK
D	NUT	1	NYLON66+33%GF	BLACK
C	GROUND	2	BRASS	NICKEL PLATING 60U"
B	CRJ45	1	Phosphor Bronze+Plastic	GOLD PLATING 60U"
A	HOUSING	1	NYLON	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信登企業股份有限公司

TITLE: RJ45 FRONT MOUNT CONN.+HOUSING

DWN: Vcky PART NO.:2133003-W051J2H
CHKD: Cerry SCALE 2:1 UNIT: mm
APVD: William SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY