



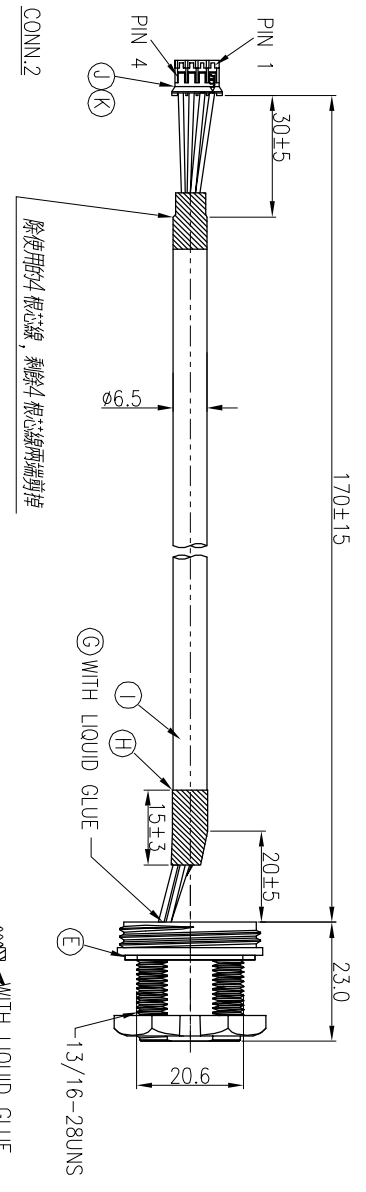


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T211008-1A		Jy	2021.12.31

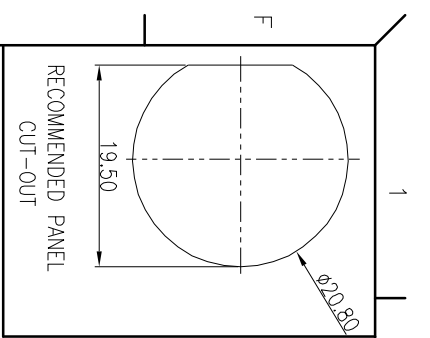

CONN.1	WIRE COLOR	CONN.2
1	ORANGE/WHITE	4
2	ORANGE	3
3	GREEN/WHITE	2
6	GREEN	1

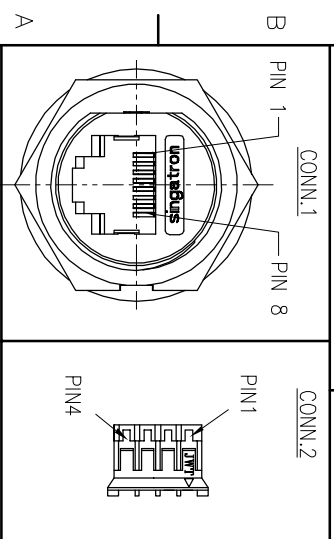

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. ELECTRICAL CHARACTERISTICS:
2-1. CURRENT RATING: 1.5A
2-2. CONTACT RESISTANCE: 3 ohm MAX.(INITIAL)
2-3. DIELECTRIC WITHSTANDING VOLTAGE: 300V AC FOR ONE MINUTE
2-4. INSULATION RESISTANCE: 30Mohm MIN. MEASURED BY 300 VDC
 3. OTHER GENERAL SPEC. TO REFER "RJ45 SERIES SPEC".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 6. FOR PANEL THICKNESS MAX OF 5.5mm

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
K	TERMINAL	4	JWT A2001T0*-2	GOLD PLATING
J	HOUSING	1	JWT A2001H02-4P	WHITE
I	CABEL	1	CAT5E FTP 24#*4P+MY+D +A/M UV RESISTANT	BLACK(PVC JACKET)
H	TUBE	2	300V	BLACK
G	LIQUID GLUE	2	N/A	BLACK
F	SCREW	1	STAINLESS STEEL	N/A
E	GASKET	1	EPDM	BLACK
D	NUT	1	NYLON	BLACK
C	GROUND	2	BRASS	NICKEL PLATING 60U"
B	CRJ45	1	Phosphor Bronze+Plonic	GOLD PLATING 60U"MIN
A	HOUSING	1	NYLON	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Suzhou Singatron Auto Electronics CO.,LTD.
蘇州信音汽車電子有限公司

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X X :±0.3	X X :±1°
X:XX :±0.2	

TITLE	PART NO.	SCALE	UNIT	SHEET	REV.
RJ45 FRONT MOUNT CONN.+HOUSING	21J3003-W051Q8H	2:1	mm	1 OF 1	A

CUSTOMER COPY