

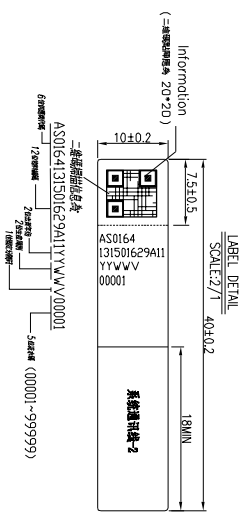


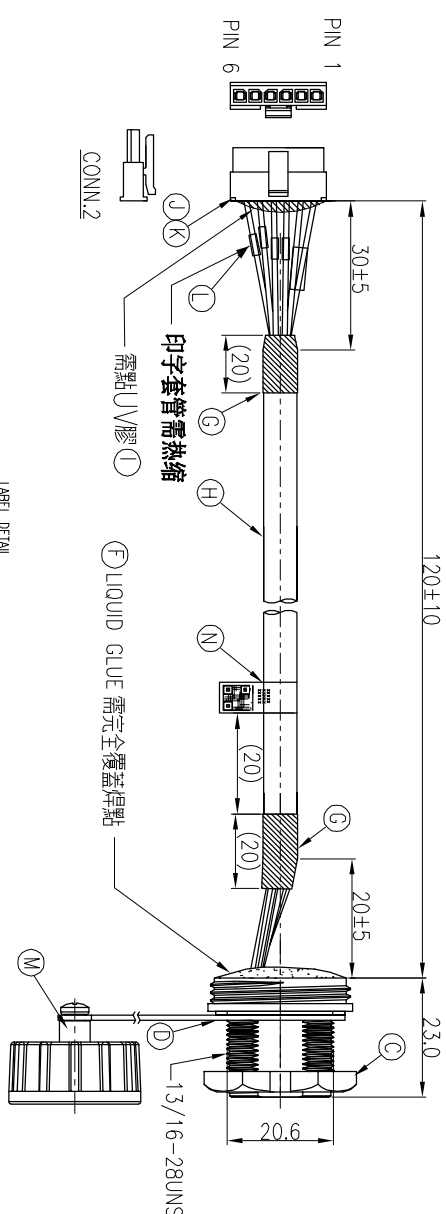


REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	A220819-1C	JAY	2023.04.25

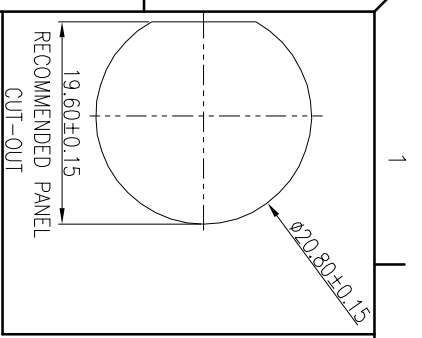

6	Blue	(GND-CAN1)	3
2	Blue&White	(DIA)	6
3	Green&White	(CAN1H)	1
4	Orange	(CAN1L)	2
5	Orange&White	(CAN2H)	5
7	Brown	(CAN2L)	4
8	Brown&White	(CANZL)	

CONN.1 WIRE COLOR&TUBE PRINT CONTENT CONN.2

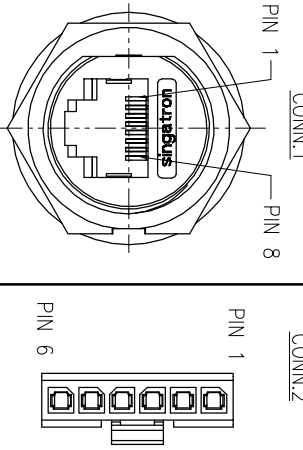

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - 2-1. RATING: 125V 1.5A
 - 2-2. CONTACT RESISTANCE: 3 ohm MAX (INITIAL)
 - 2-3. DIELECTRIC WITHSTANDING VOLTAGE: 300V AC FOR ONE MINUTE
 - 2-4. INSULATION RESISTANCE: 300Mohm MIN. MEASURED BY 300 VDC
 - OTHER GENERAL SPEC. TO REFER "RJ45 SERIES SPEC."
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 - FOR PANEL THICKNESS MAX OF 5.5mm
6. Bar code printing:
THE BARCODE SHALL BE PRINTED BY THE MANUFACTURER ACCORDING TO THE SHIPMENT SCHEDULE, AND THE PRODUCTION SCHEDULE SHALL BE PRINTED DURING THE PRODUCTION CYCLE.
THE FLOW CODE IN THE BAR CODE IS ARRANGED FROM 00001 TO THE LAST ONE OF THE PRODUCTION IN THE SAME WEEK ACCORDING TO THE PRODUCTION QUANTITY OF THE FILE WEEK.
7. Torque Force: 0.8 ~ 1.0 Nm

N	LABEL	1	L40*W10mm	WHITE
M	WATERPROOF CAP	1	P/N:2UB3001-W0000W	BLACK
L	TUBE	6	L=15MM SEE PIN OUT TUBE PRINT CONTENT	BLACK
K	TERMINAL	6	WF 3001-TPSNOX	Bright Tin Over Nickel
J	HOUSING	1	WF 3001-1H06B01	BLACK
I	UV GLUE	2	N/A	NATURAL
H	CABEL	1	4P*24AWG+D+AL U2517 W-1 0D:5.5mm	BLACK (PVC JACKET)
G	TUBE	2	125°C 300V	BLACK
F	LIQUID GLUE	2	N/A	BLACK
E	SCREW	1	STAINLESS STEEL	N/A
D	GASKET	1	EPDM	BLACK
C	NUT	1	NYLON	BLACK
B	RJ45+PCB	1	Phosphor Bronze+Plastic	GOLD PLATING 6U"
A	HOUSING	1	NYLON	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Suzhou Singatron Auto Electronics CO.,LTD.
蘇州信音汽車電子有限公司

DECIMALS:	ANGLES:	TITLE	PART NO.	FRONT MOUNT CONN.+HOUSING
X : ±0.5 XX : ±0.3 XXX : ±0.2	X : ±2° XX : ±1° XXX : ±0.2	DWN	JAY	RJ45 FRONT MOUNT CONN.+HOUSING
		CHKD	MF	SCALE 2:1 UNIT: mm
		APVD	JF	SIZE: A4 SHEET: 1 OF 1 REV: A

CUSTOMER COPY